


Model #
T6UL

HARDWARE



5/16" x 1"
Machine Bolt

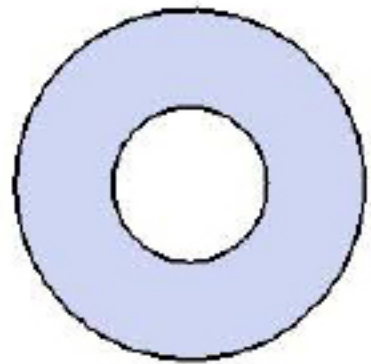


5/16" Washer




5/16" Kep Nut


TOOLS REQUIRED

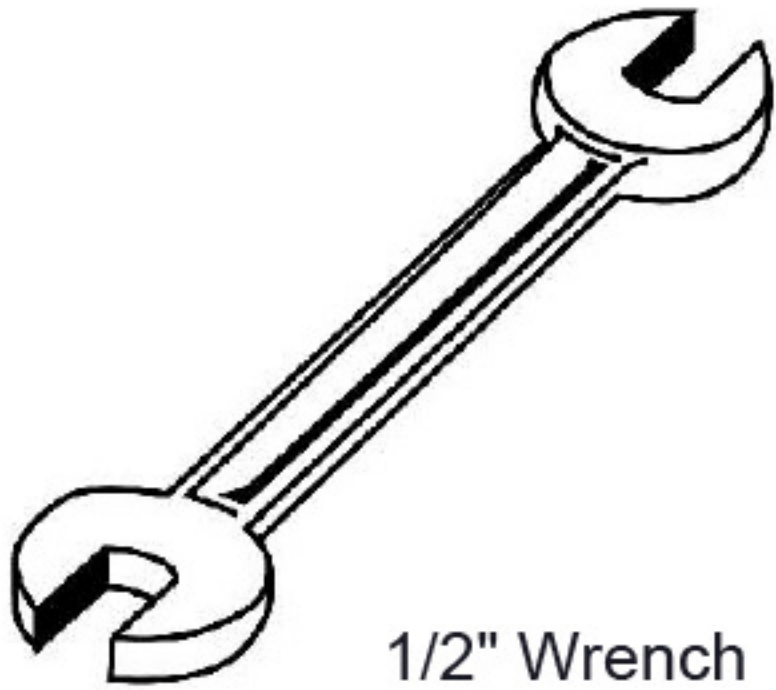


1/2" Wrench

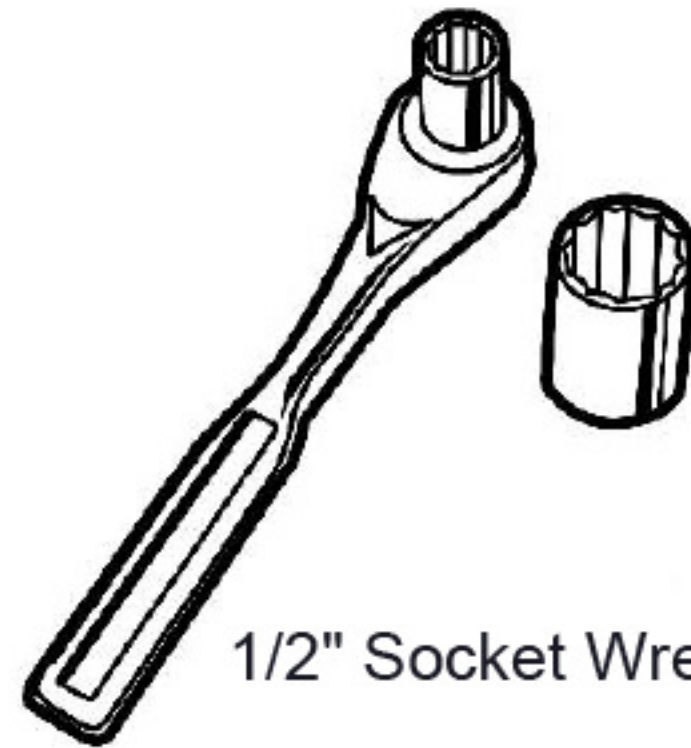

1/2" Socket Wrench

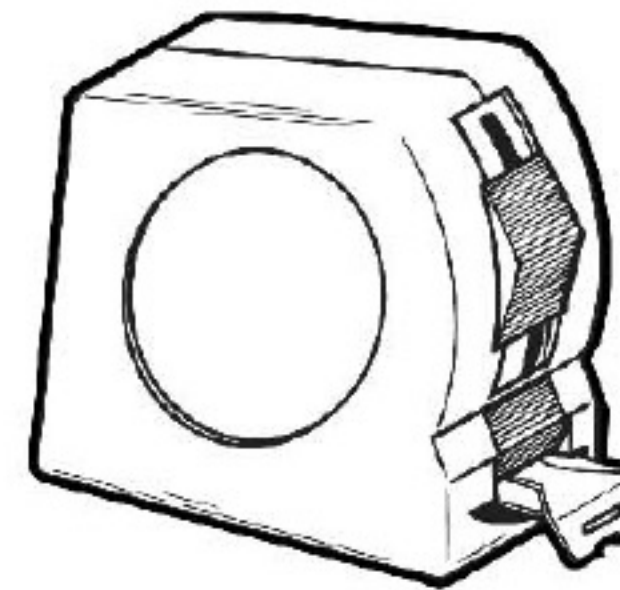

Tape Measure

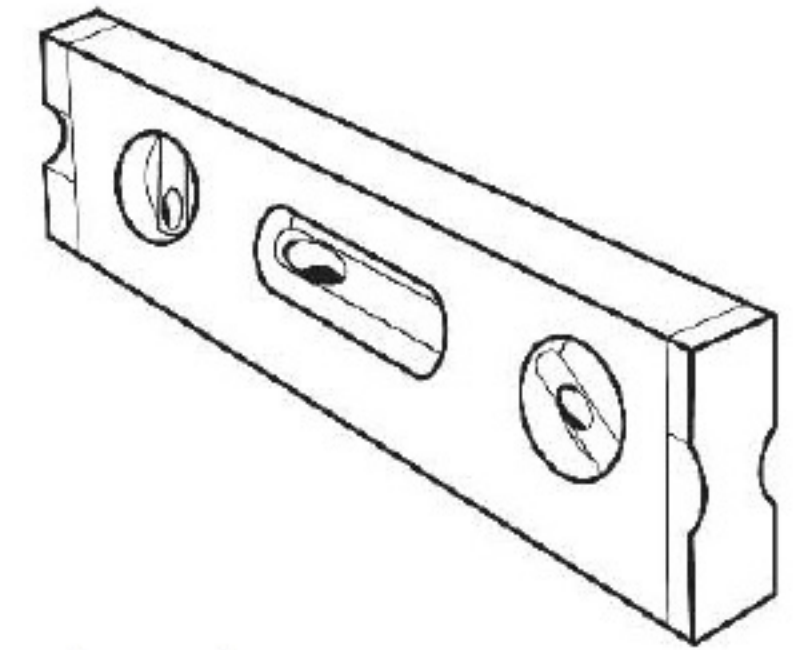

Level

PRODUCT SPECIFICATIONS

238-EV6 6' PORTABLE PICNIC TABLE WALK-THROUGH DESIGN

Top & Seats: 11 gauge die formed angle frame 1"x1-7/8" with 3" radius corners. 3/4" #9 steel expanded metal. 10 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Cross braces 1" O.D. x 16 gauge pre-galvanized structural steel tubing. Brace attachment points 1-1/2"x1-1/2"x3/16" steel angle. Seat and top mounting points 7 gauge x 1-1/2" die stamped steel flat bar. Legs are bent over a mandrel through the bend radius producing a wrinkle free bend. Holes are predrilled in legs for optional surface mounting. All electrically MIG welded.


Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.

Dimensions: 6' portable picnic table walk-through design. Top is 30" wide x 72" long and is 30-1/4" high. Seats are 10" wide x 72" long and 18-1/2" high. Outside to outside dimension is 66-1/2" x 72".


COMPONENTS

Optional Surface Mount Hardware:
5/16" x 5-1/2" Concrete Expansion Anchor Bolts
(Not Included)

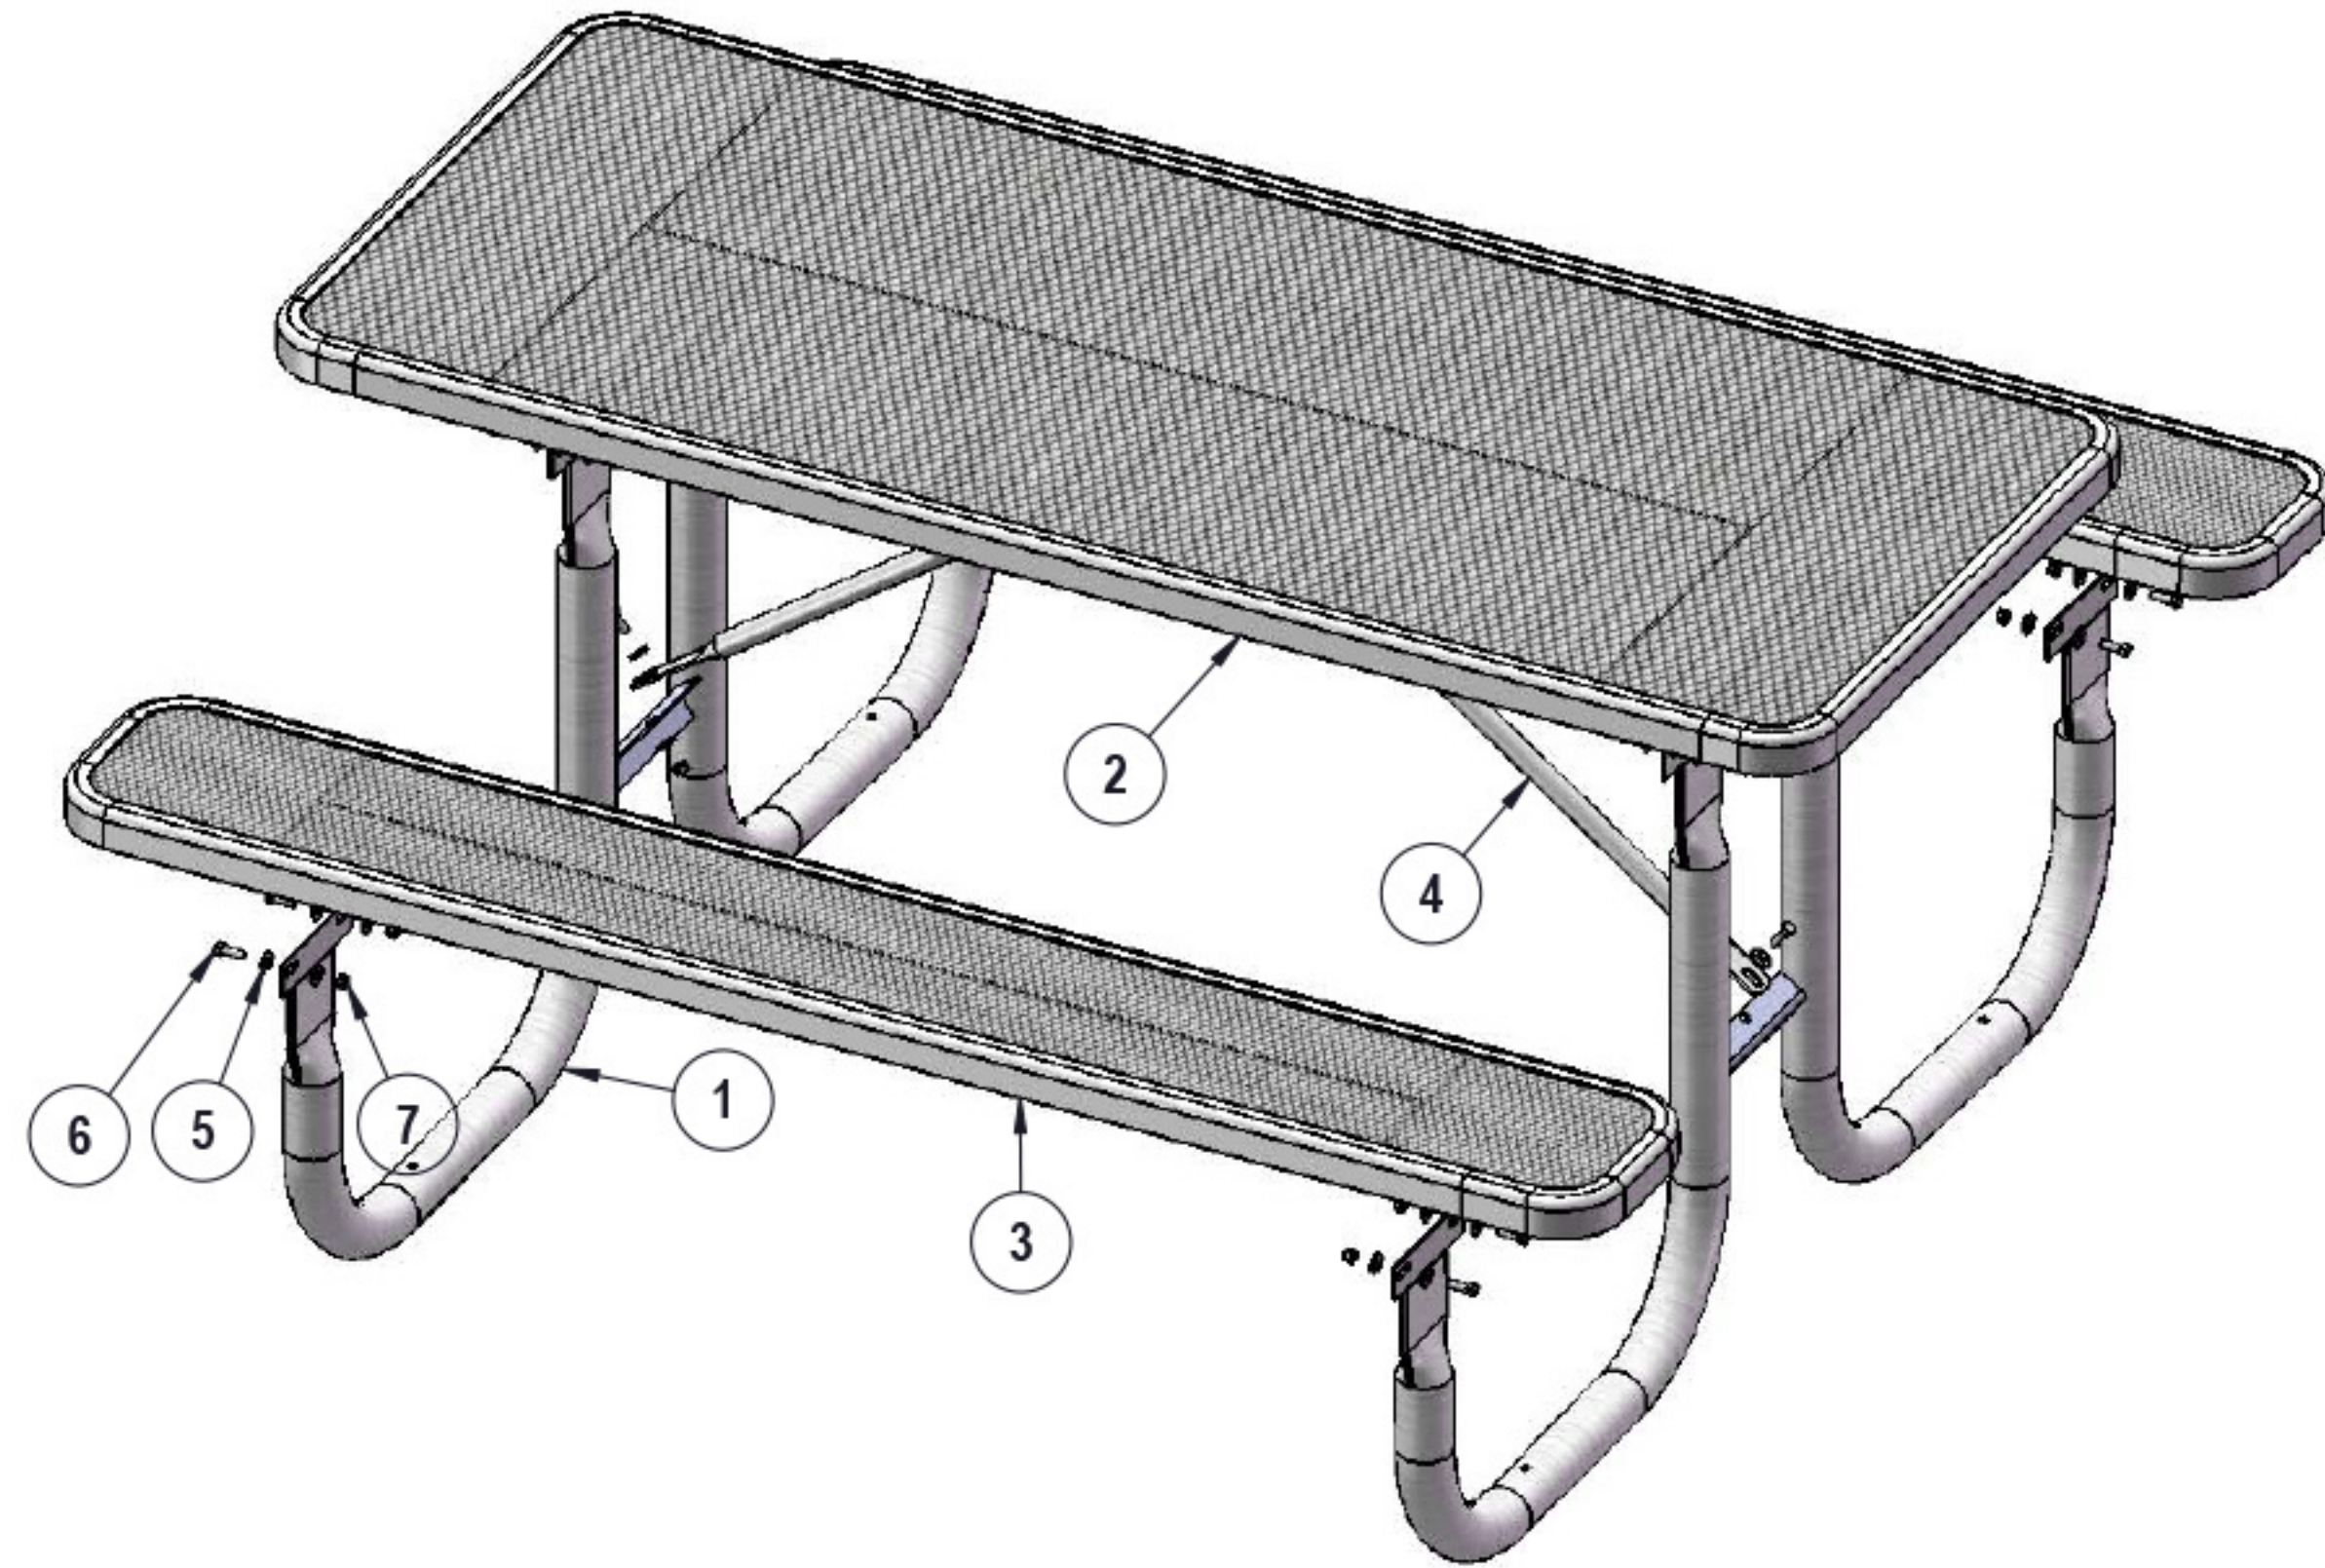


| ITEM NO. | PartNo | DESCRIPTION | QTY |
|----------|--------------|------------------------------|-----|
| 1 | P-V238 | 238 Vinyl Frame | 2 |
| 2 | T-EV72-T | 6' expanded top | 1 |
| 3 | T-EV72-S | 6' x 10" expanded seat | 2 |
| 4 | P-01-04-0125 | 29 7/8" Brace | 2 |
| 5 | 33-02-0007 | 5/16" SS Washer | 40 |
| 6 | 33-05-0029 | 5/16" x 1" Machine Bolt (SS) | 20 |
| 7 | 33-03-0012 | 5/16" Kep Nut (SS) | 20 |

STEP 1

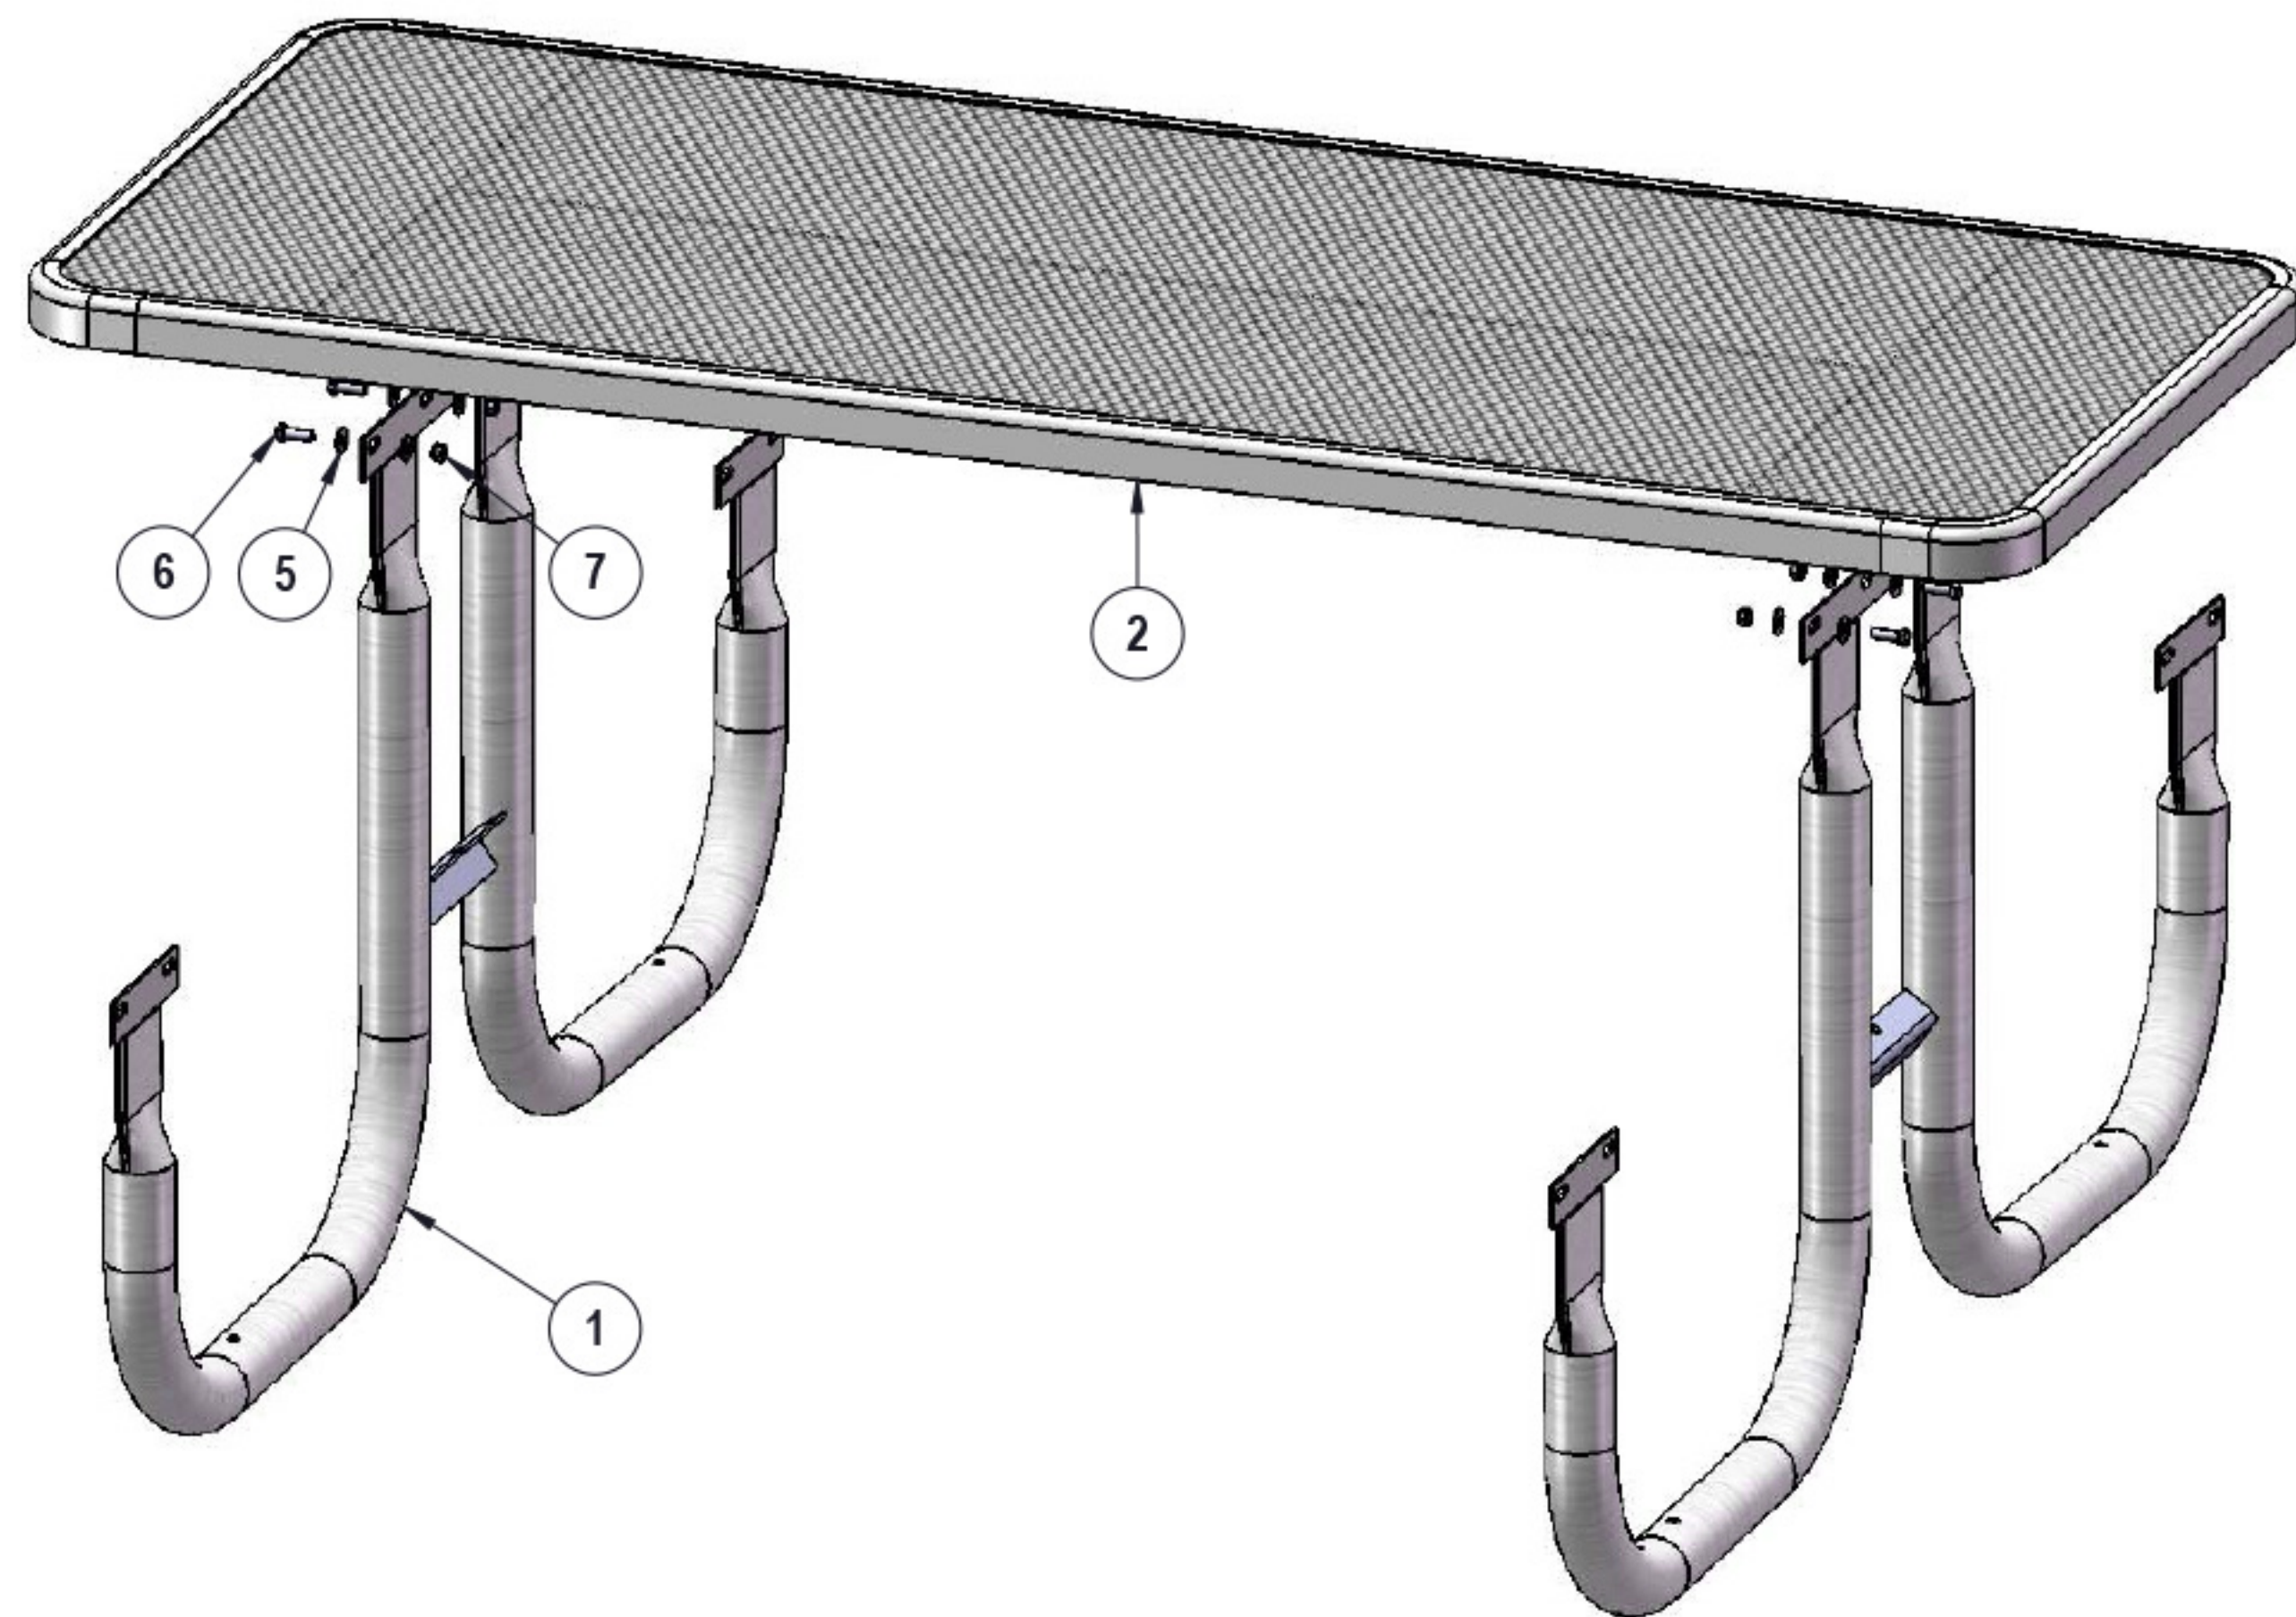


Attach the 6' Top to the Legs using specified hardware.

STEP 2

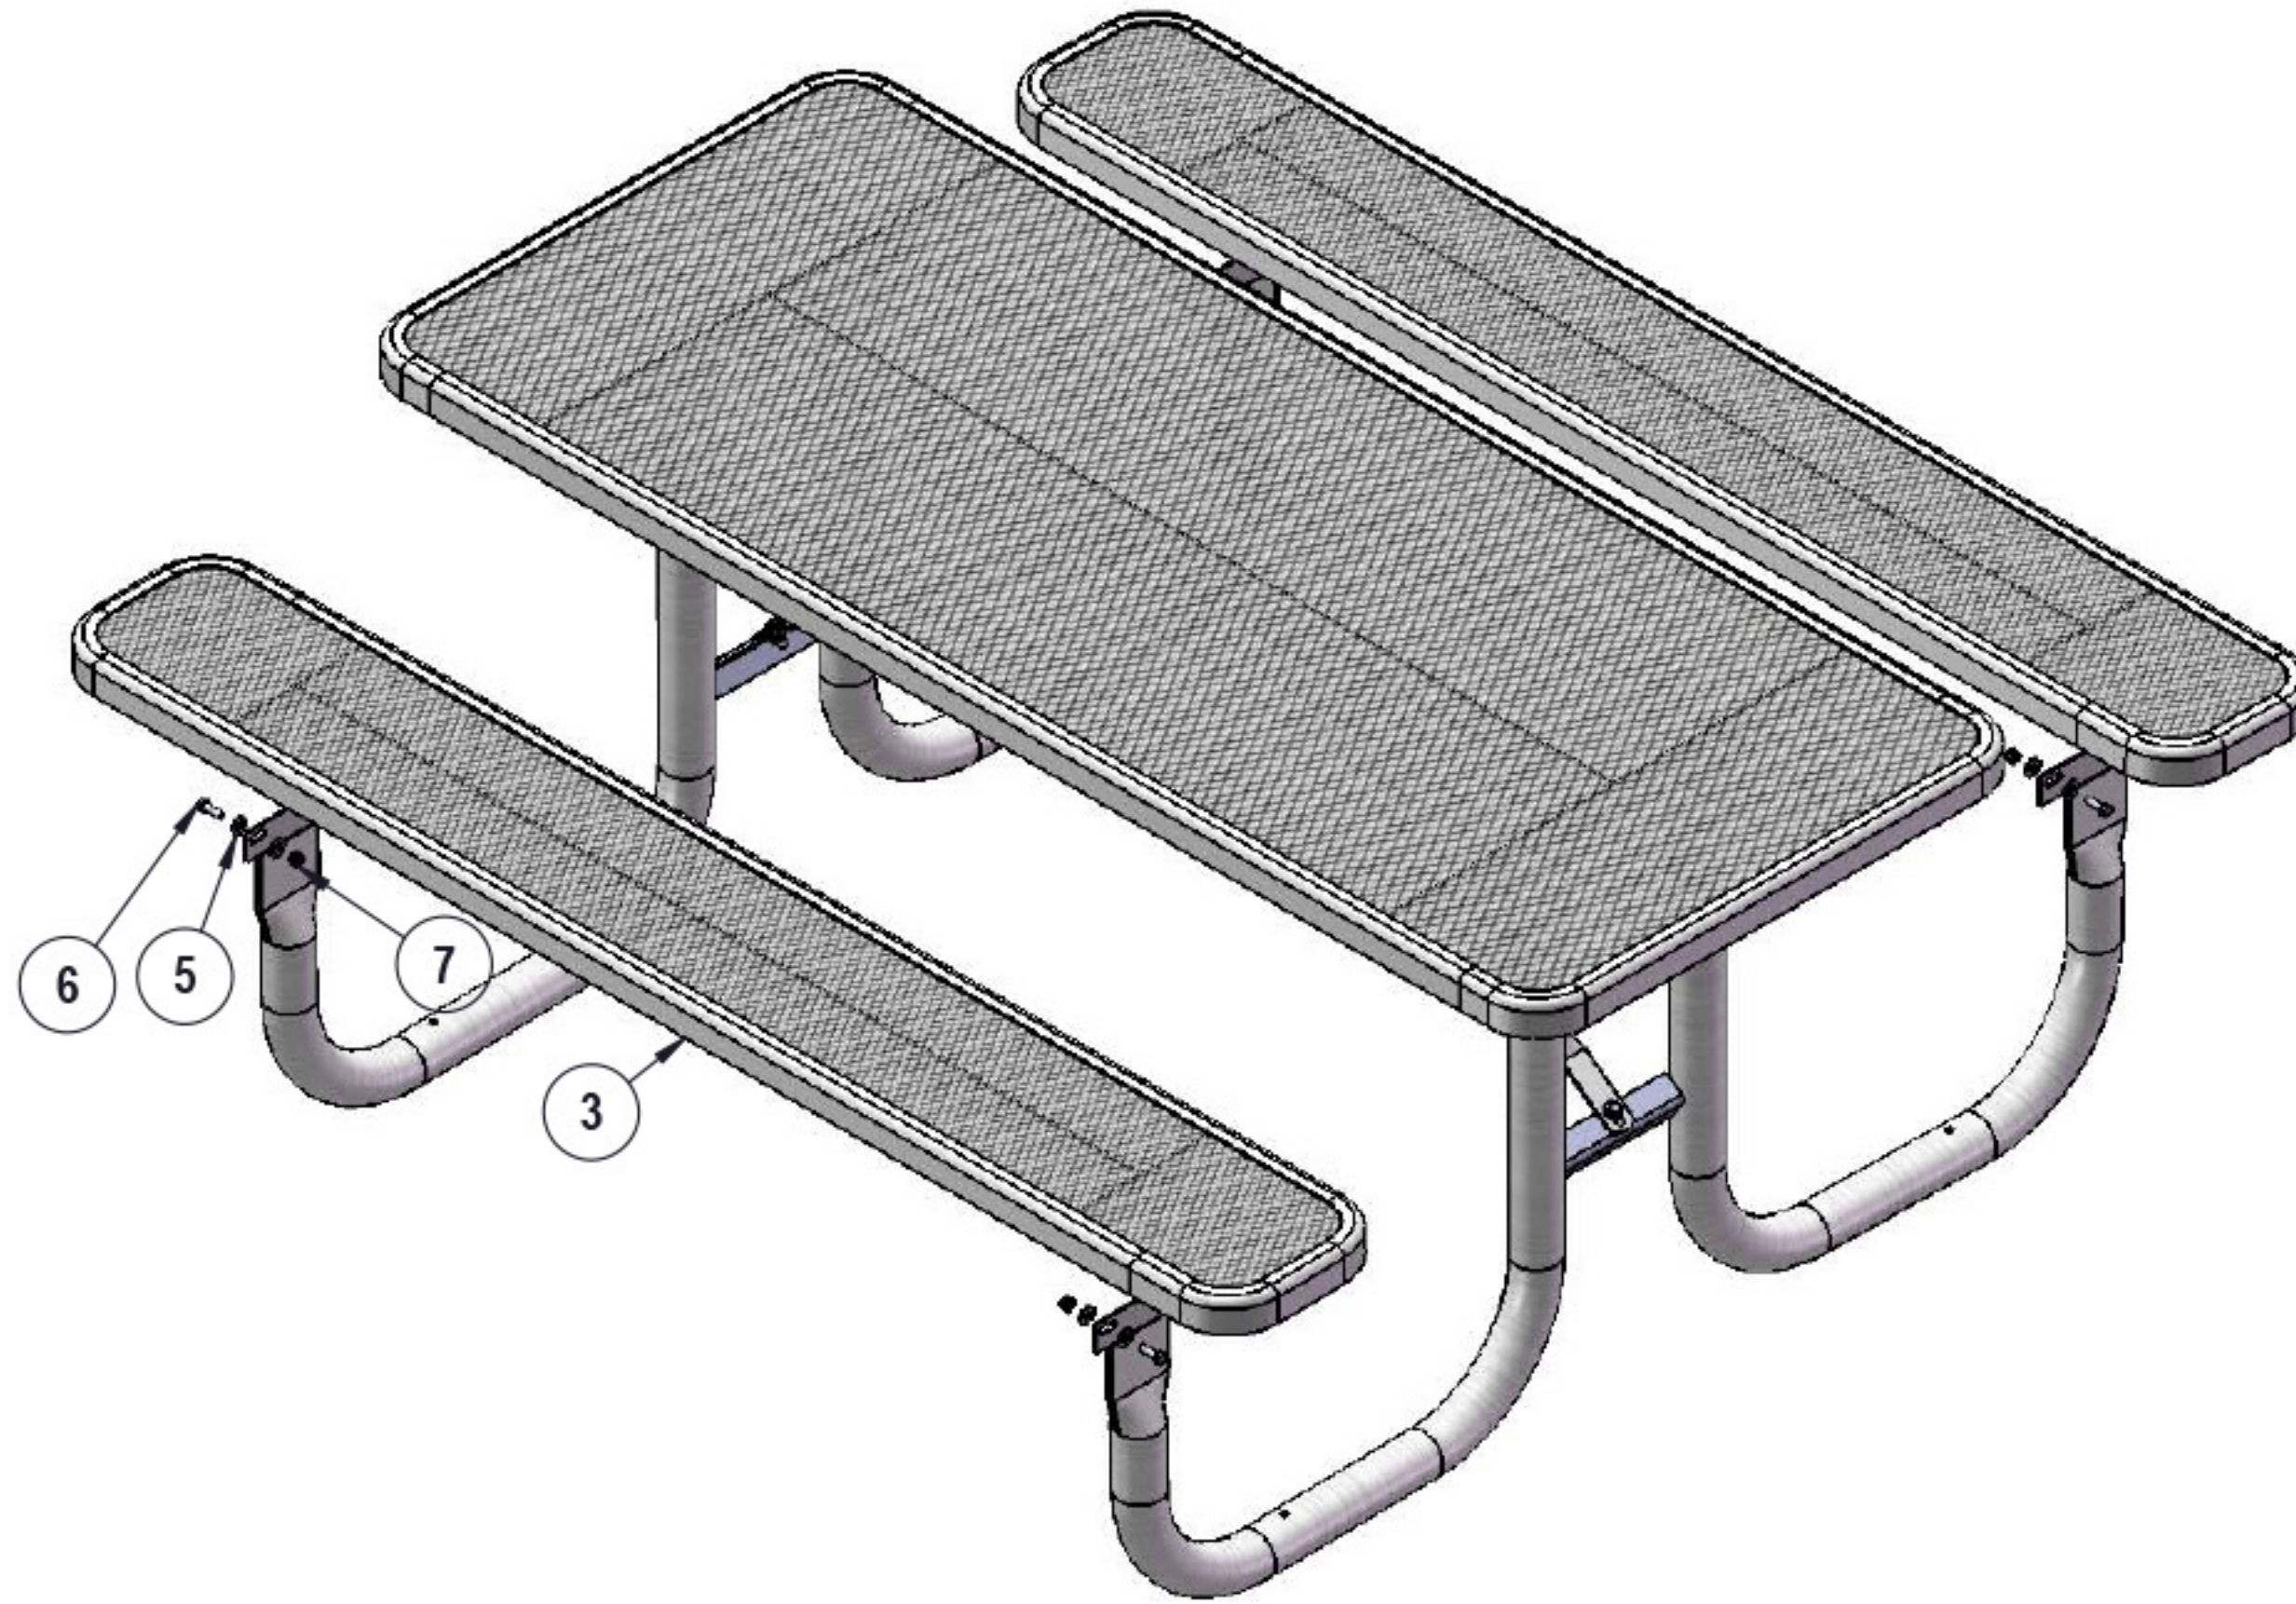

Attach the 6' Seats to the Legs using specified hardware.

STEP 3

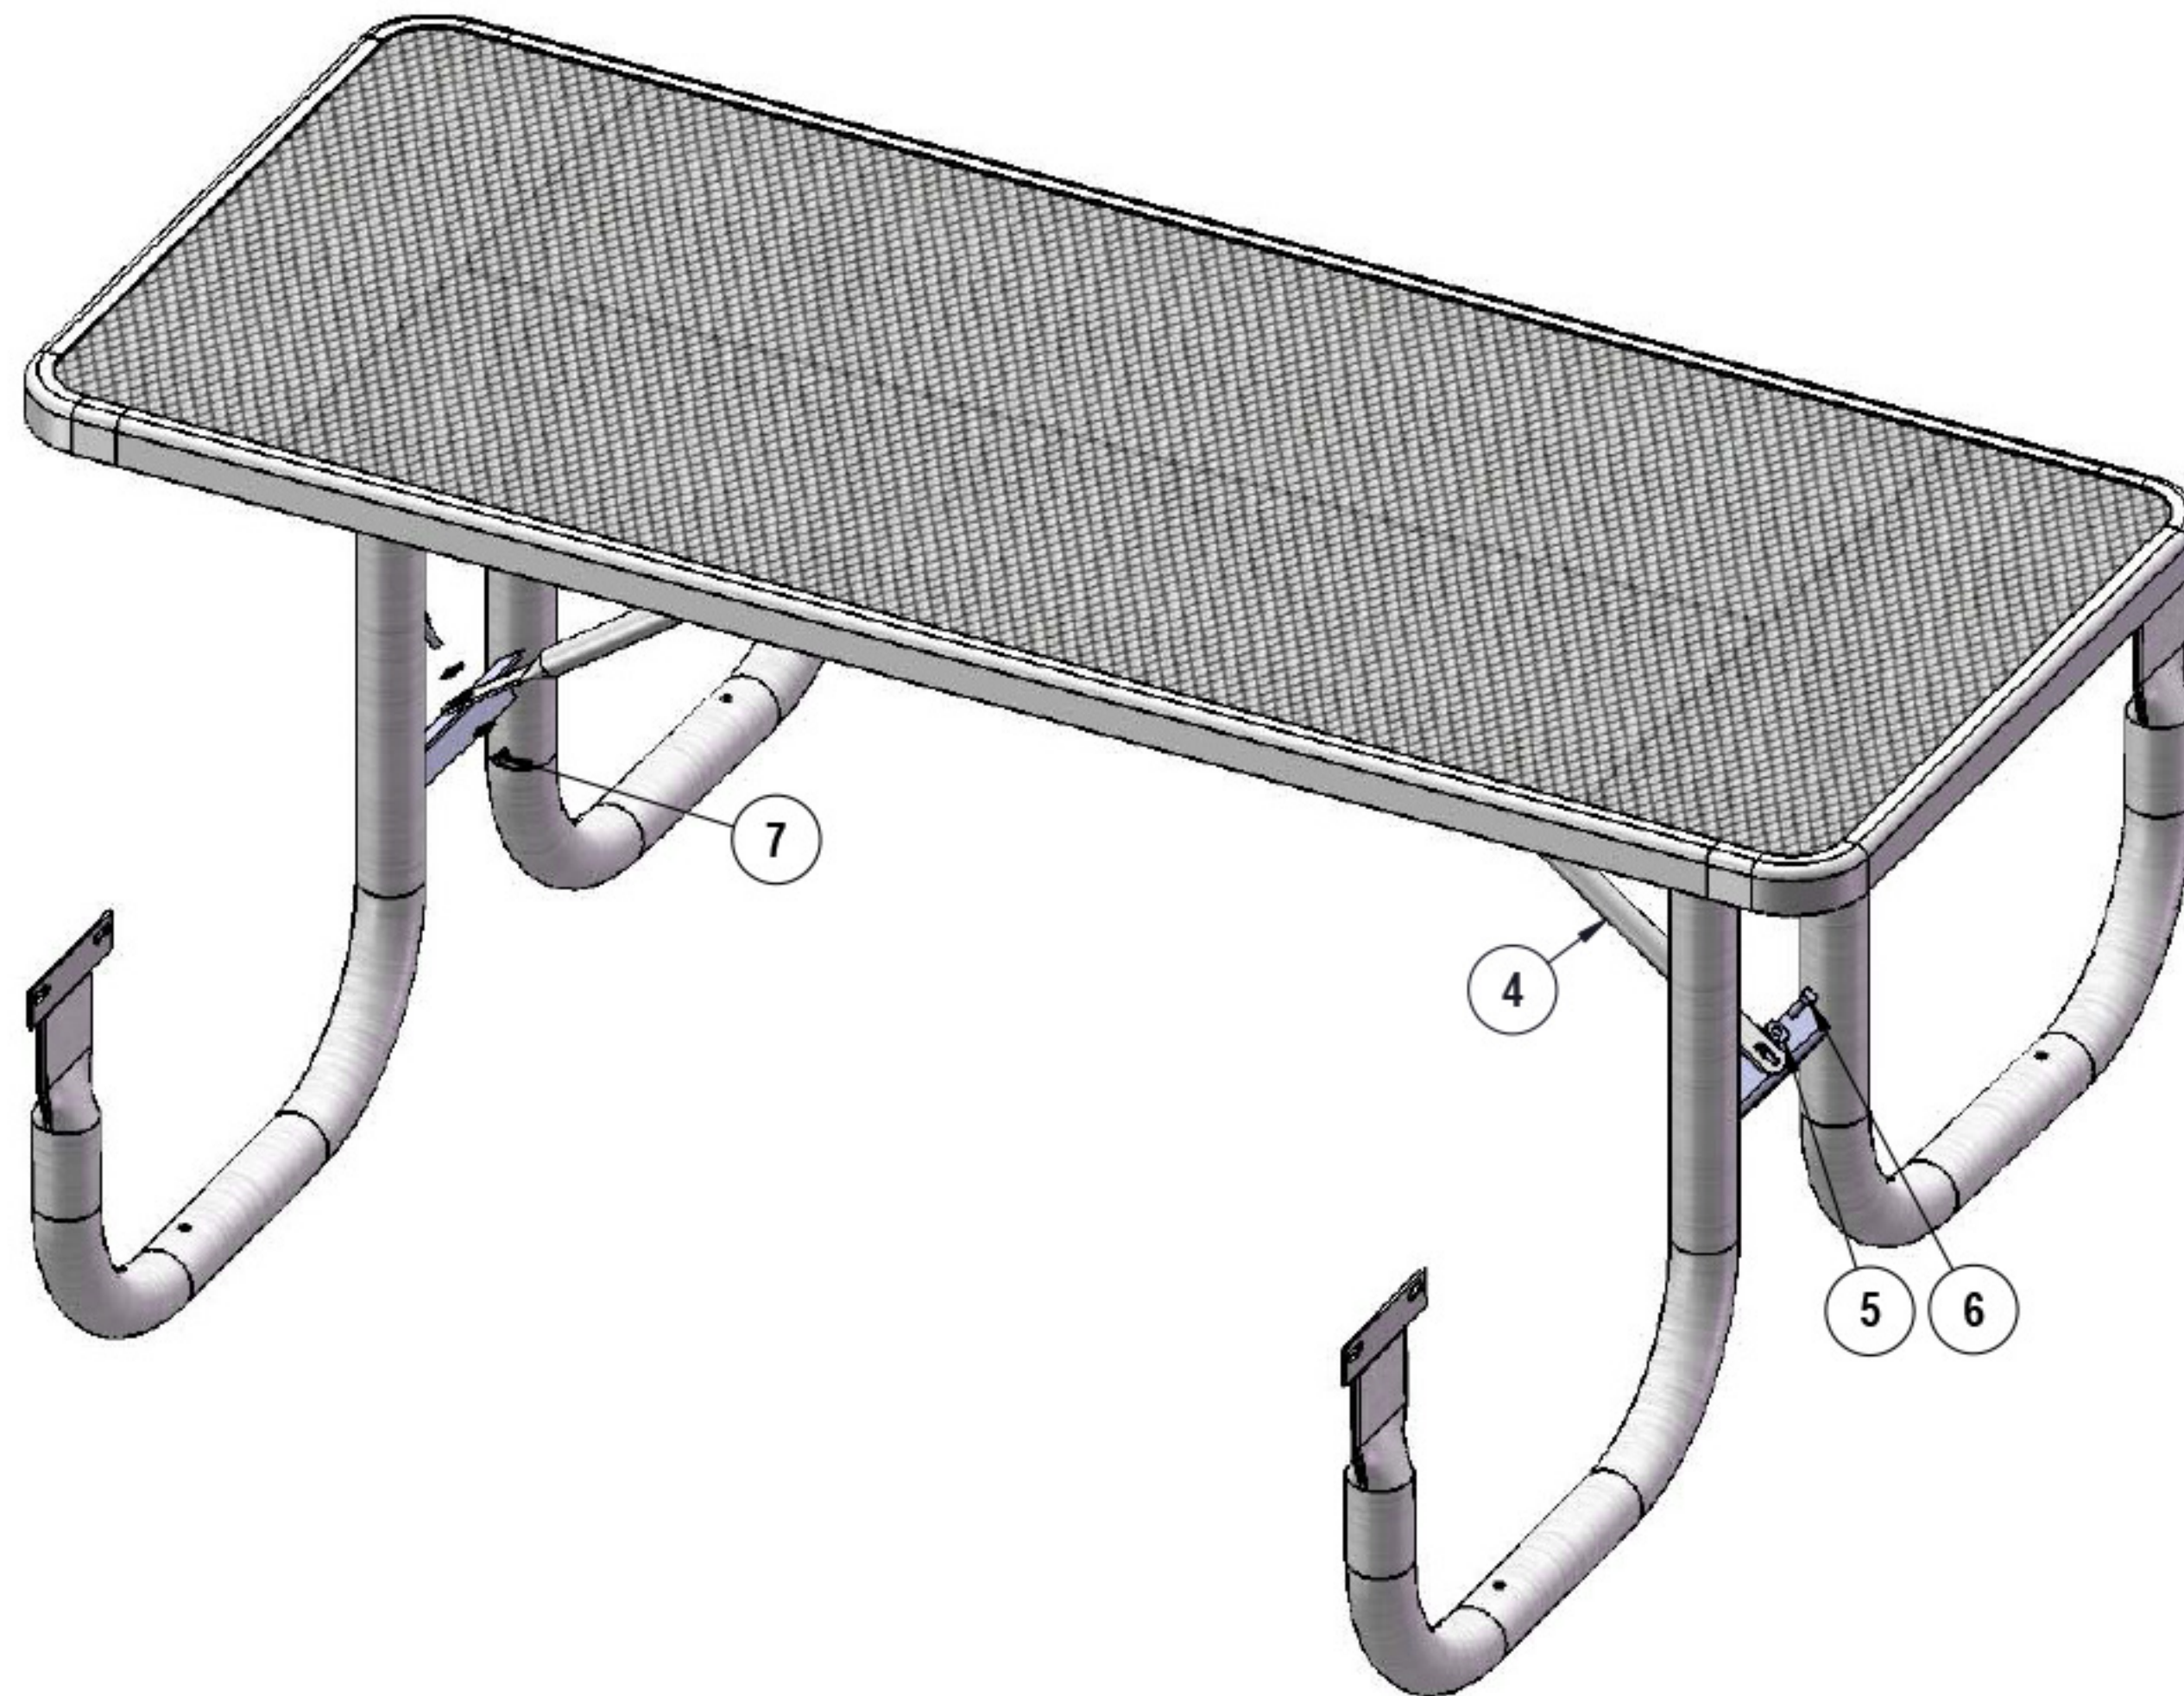

Attach the 29 7/8" braces to the Legs using specified hardware.

OVERALL DIMENSIONS

