


Dog Themed Bench



DOG11-D-18-000

Parts, Hardware, and Suggested Tools

Unit	Common Description	Units Per Model
6'	Rectangular Seat Planks	2
	Portable Bench Frame	2
	Diagonal Brances	2
	5/16-18 x 1 1/2" tap bolt w/black xylan	10
	5/16"x3"hex capscrew w/black xylan	2
	5/16-18 nylock nut w/black xylan	12
	5/16 ussflat washer w/black ox	24
	#vc300-85/16" bolt size 1/2" lg vinyl cap	10

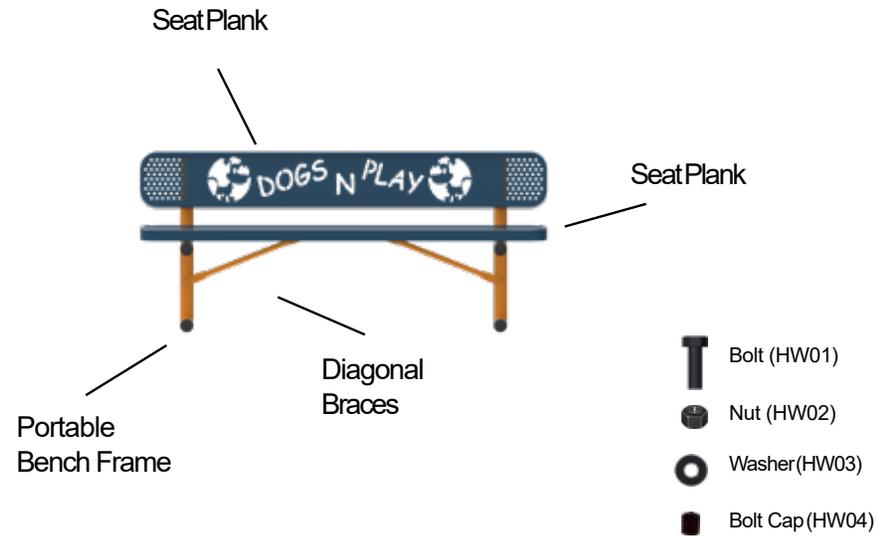

Suggested Tools



Open Face Wrench



Socket Wrench



Tape Measure



Level

Specification - Written

SeatMaterial: Outer frame is made from 3/4" x 2" rolled form angle iron.

- Punched Steel models- Inside material is 12 gauge, 1/2" punched Steel. Bracing is 1-1/2" Solid Steel flat bar. All MIG welded.

SeatCoating:

- Industry Standard Coating - the Industry Standard line is coated with a Premium Polyethylene Coating, The Industry Standard coating comes with a 5 year warranty and is available in 9 different colors



Frames: Frames are made from 2-3/8" OD pre-galvanized steel tubing.

FrameCoating: High Durability Architectural Grade electrostatic applied Powder Coat.

Hardware: All hardware is Xylan coating black hardware for extra protection and strength

Dimension: 6' Portable Bench with Back Overall Dimension: 72" L, Seat Height 18" (after install), Overall Height 30.5", Seat Width 10"

Specification - Drawing

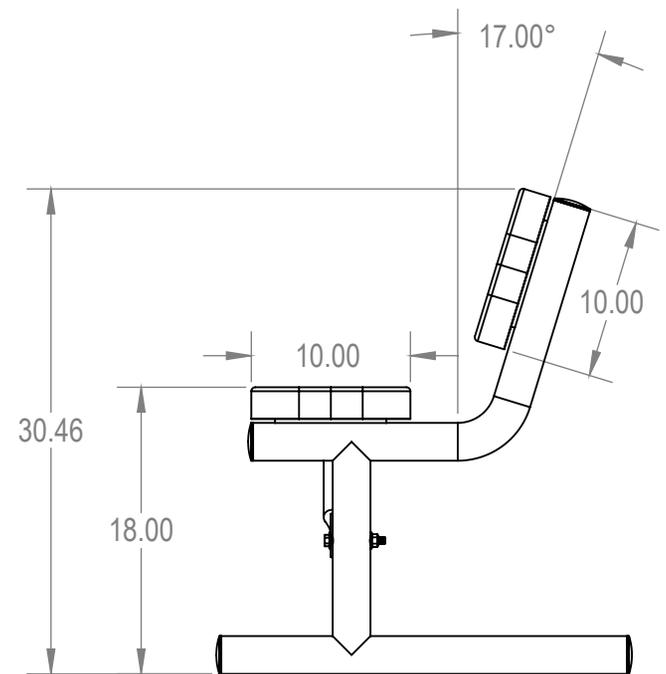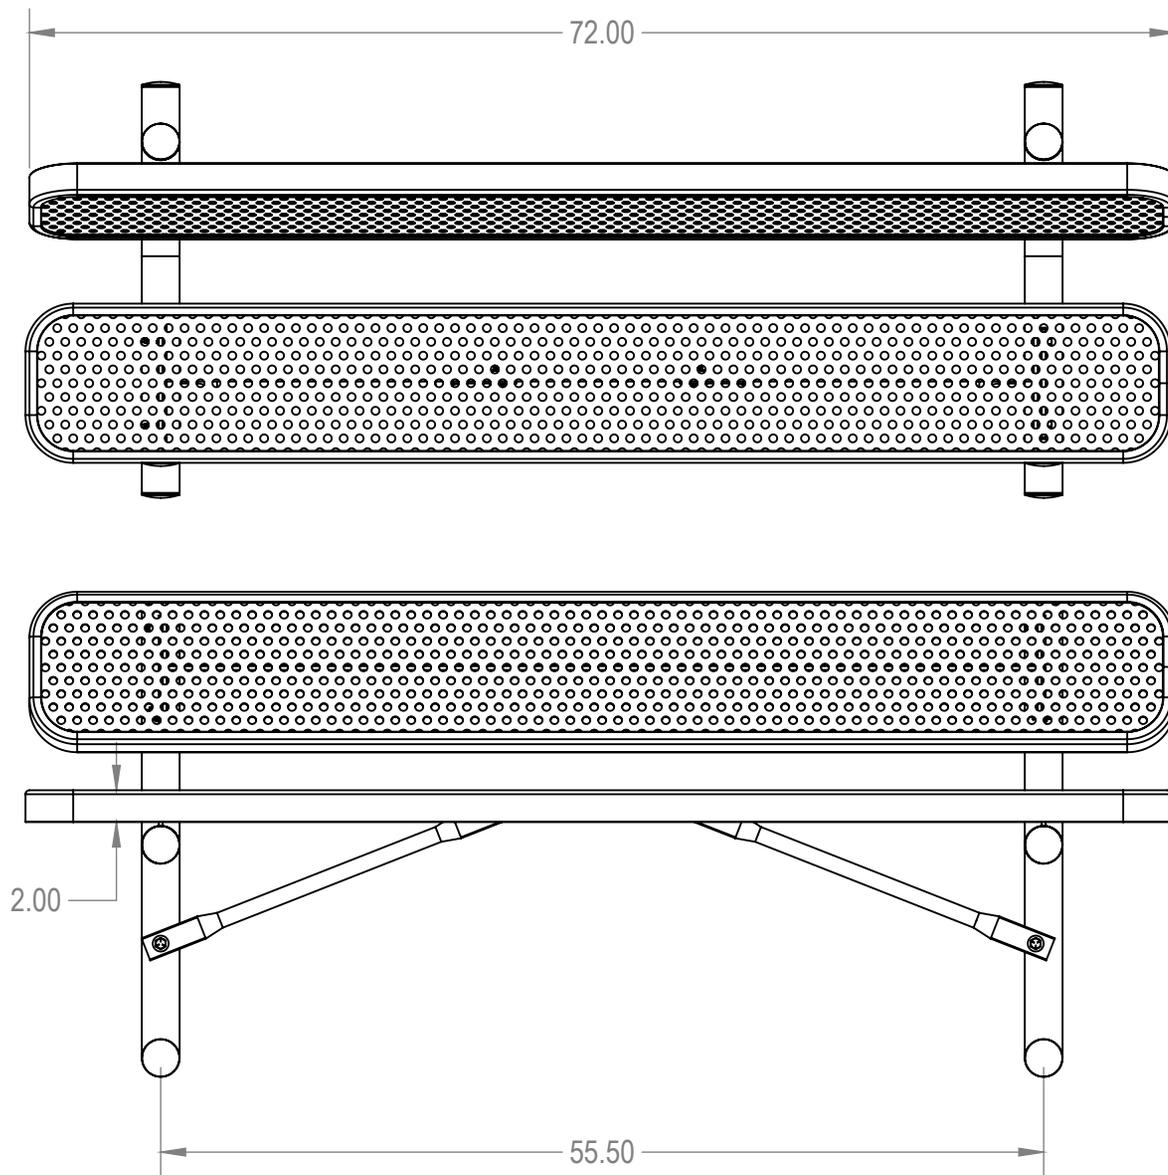

Assembly Instructions

- 1. Attach Seat Plank for bottom seat to Portable Bench Frame using Hardware Provided. (Hand tighten at this time)**
- 2. Attach Seat Plank for Back seat to Portable Mount Bench Frame using Hardware Provided. (Hand tighten at this time)**
- 3. Attach Diagonal Brace to Portable Bench frames from hole in center of leg post to bracket under Seat Plank (use 3" Bolts for legs)**
- 4. Level seat and back and tighten bolts**

MyTCoat does not offer installation: Recommend a professional installer to install bench.

Installation Safety:

Please Follow Installation Instructions provided by Manufacturer

It is recommended that Product is installed by an experienced installer

Product should be inspected at the time of Delivery, do not install and damaged on defective parts or products.

All Hardware for proper assembly (not installation) is provided. Use hardware that is included with this product.

Product Maintenance:

Maintenance inspection should be performed at a minimum of once a year.

Cleaning, when necessary can be performed with warm water and most household cleaners, avoid any harsh chemicals such as paint remover and acetone. Contact Manufacturer before cleaning to determine if cleaning product is OK for use.

Any surface rust that may occur should be removed and repainted. Contact Manufacturer for touch up paint or any other recommended paints.

Contact Manufacturer for instructions on removing vandalism such as spray paint.

In the case that the MyTCoat coating is damaged, contact Manufacturer for instructions for repair.

Bolts and nuts should be checked on a regular basis to maintain proper tightness.