

INSTALLATION GUIDELINE

USER GROUP: 2-5 Years, 5-12 Years

RECOMMENDED CREW: 1 Person

TOOLS REQUIRED:

- SH-41 Shackle Tool (Included), 3/16" Allen
- Level, Square
- Drill Bits: None
- High Speed 3/8" Electric Drill with Clutch

NOTE: Use of any other driver may result in damage to product, tool, and/or hardware!


NOTE: Apply Thread Locking Solution to ALL Non-Patched Hardware with Threads!

INSTALLATION TIME: 1/4 Hour

WEIGHT: 64 lbs.

CONCRETE REQUIRED: None

ITEM	Part No.	QTY	DESCRIPTION
1	221570	1	Team Swing Seat
2	H-40-64I	4	Galvanized, 4/0, Heavy Duty, Chain, Cut to 64"
3	161853	4	Stainless Steel D-Shackle
4	SH-40	2	Shackle Clevis (SH-40) Galvanized
5	SH-41	1	SH-41 Allen Wrench

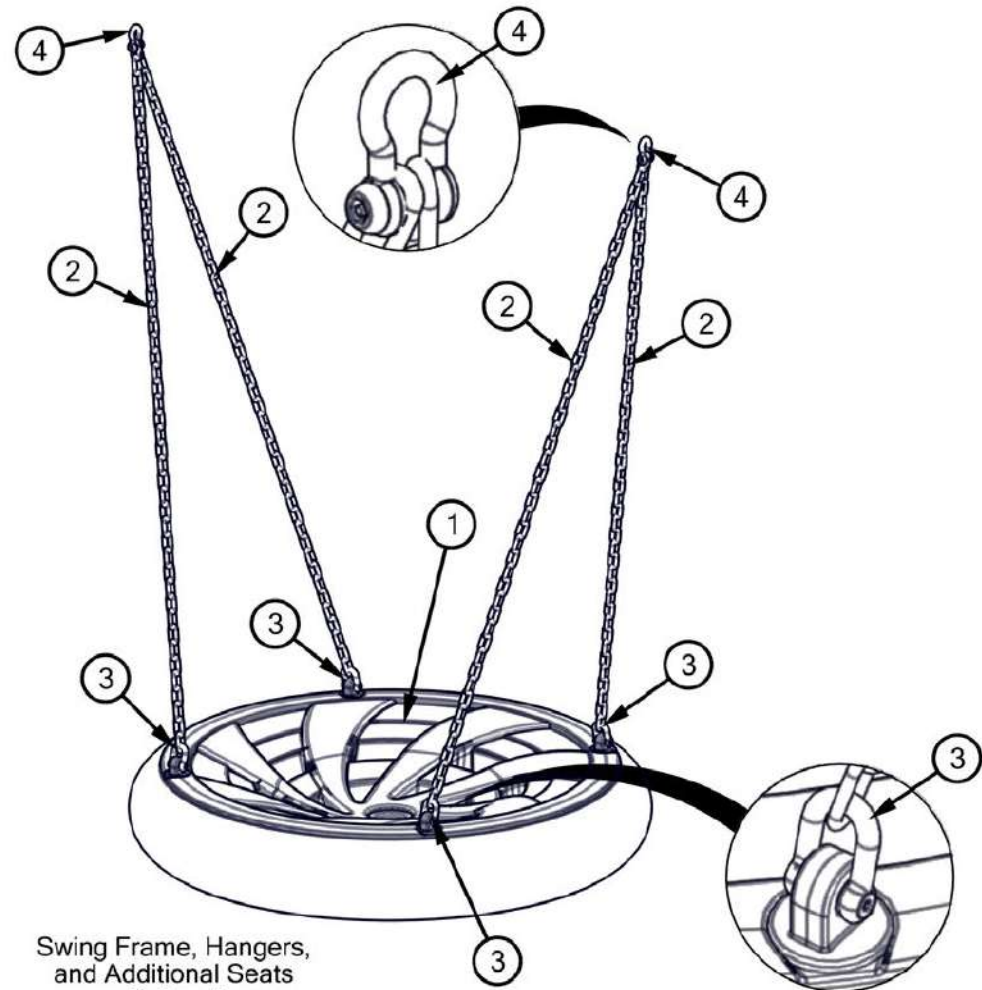

Swing Frame, Hangers,
and Additional Seats
Ordered
Separately

PRE-INSTALLATION CHECK:

Customer is responsible for verifying materials received by comparing received items with packing list. If any parts are missing or damaged, including documentation, contact your local sales representative immediately.

Supplier is not responsible for items discovered missing after 72 hours from time of delivery.

Before beginning installation, all installers must read and understand the Installation Introduction manual as supplied. If you did not receive a copy, or if you have any questions regarding any information in the Installation Instructions or this Installation Guideline, contact your local sales representative.

STEP 1

Connect four (4) 64" chains to four (4) eye connectors on team swing using four (4) D-shackles. Opening of shackle jaws **MUST POINT DOWNWARD**.

STEP 2

Verify spacing of team swing and frame. Use Detail Chart 2-1 to verify proper team swing and frame spacing. Swing should be weighted before measuring. Connect two (2) chains with one (1) shackle clevis to hanger on top bar. Opening of shackle jaws **MUST POINT DOWNWARD**. **DO NOT** attach swing chains or swing to swing frame until play area is open and available for use.

Detail Chart 2-1

