


3/8"-16x 2 3/4" Hex Bolt,
Lock Washer and Nut here.

3/8"-16x 7/8" Hex
Serrated Washer
Head Bolt

3/8"x 2 3/4" Hex Bolt,
Lock Washer and
Nut Here

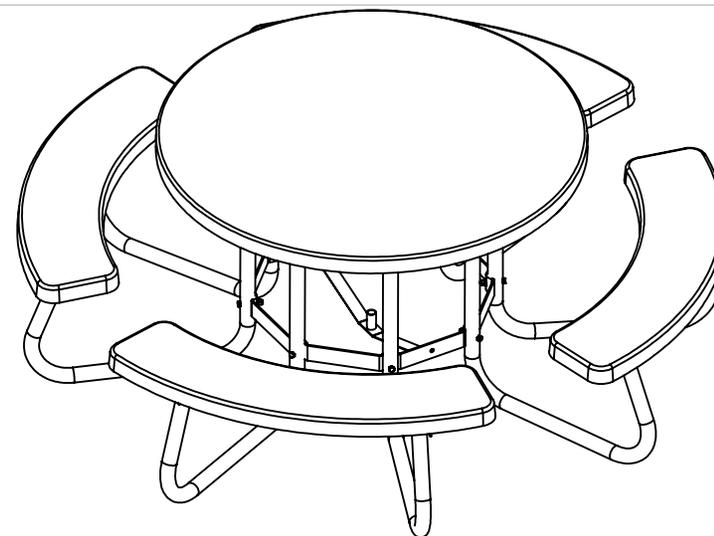


1. Lay down a protective surface, such as the box it was delivered in, and turn table top upside down on it. All connections are finger tight only, until the table is fully assembled.

2. Attach the table legs, one at a time, to the sides of the support bars in the table top. Use a 3/8" x 2 3/4" hex bolt with a lock washer and a nut. Be sure that each leg is on the same side of the support bars as you go around the table.

3. Now bring the rest of the legs up, one at a time and attach to the ring the same way using 3/8" x 2 3/4" hex bolt with a lock washer on each side and a nut.

4. Attach the seats to the sides of the seat mounting angles on the legs with two 7/8" hex serrated head bolts (Four bolts per seat)

5. Tighten all the bolts. Turn the entire assembly right side up (2 people are needed for this).

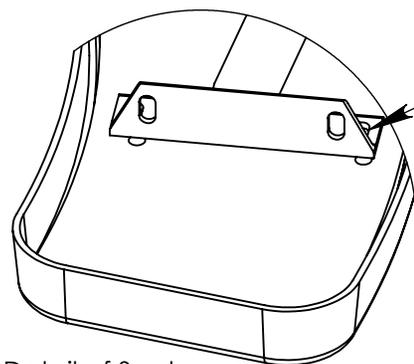

3/8"x 7/8" SERRATED
FLANGE HEAD BOLT

Detail of Seat
Mounting Bracket

GENERAL NOTES

DIMENSIONS ARE IN INCHES
TOLERANCES: LINEAR: ± 1/16
ANGULAR: ± 1°



CONFIDENTIAL DRAWING.
INFORMATION IS NOT TO BE COPIED OR
DISCLOSED TO OTHERS WITHOUT
CONSENT OF KAY INDUSTRIES.
SPECIFICATIONS SUBJECT TO CHANGE
WITHOUT NOTICE.

SHEET SIZE

A

SCALE

1:50

REV



K Industries, Inc.

ROUND TABLE FIBERGLASS TOP AND SEATS

DRAWN BY

DAT

4/27/2009

DESC:

APPROVED

MATL:

LAST SAVED

Brent

10/25/2018

PART NO: RTRCF

Built In House

PATH TO PART OR ASSM - S:\CADDRWGS\Solidworks\Tables\RTR\

Configuration - Fiberglass

10/25/2018 7:41:40 AM

SHEET 1 OF 1