


3. Frames are fabricated from 2" x 2" x 3/16" 6061-T6 aluminum angles.
4. X braces are fabricated from 3/8" x 1-1/2" 6061-T6 aluminum flat bars.
5. Seat brackets are fabricated from 1/8" 6061-T6 aluminum extrusions.
6. All bolted joints use 1/2" diameter zinc/empigard plated bolts or 3/8" flange head nuts.
7. We use bolts for joining rather than welds to avoid stress cracking associated with welding.
8. All benches have frames that are on 6' centers with 18" of plank overhang on each end.
9. 21' benches are 4 frames wide.

**THIS BENCH MUST BE INSTALLED WITH THE BACK WITHIN 4" OF A FENCE AT LEAST 84" HIGH.**

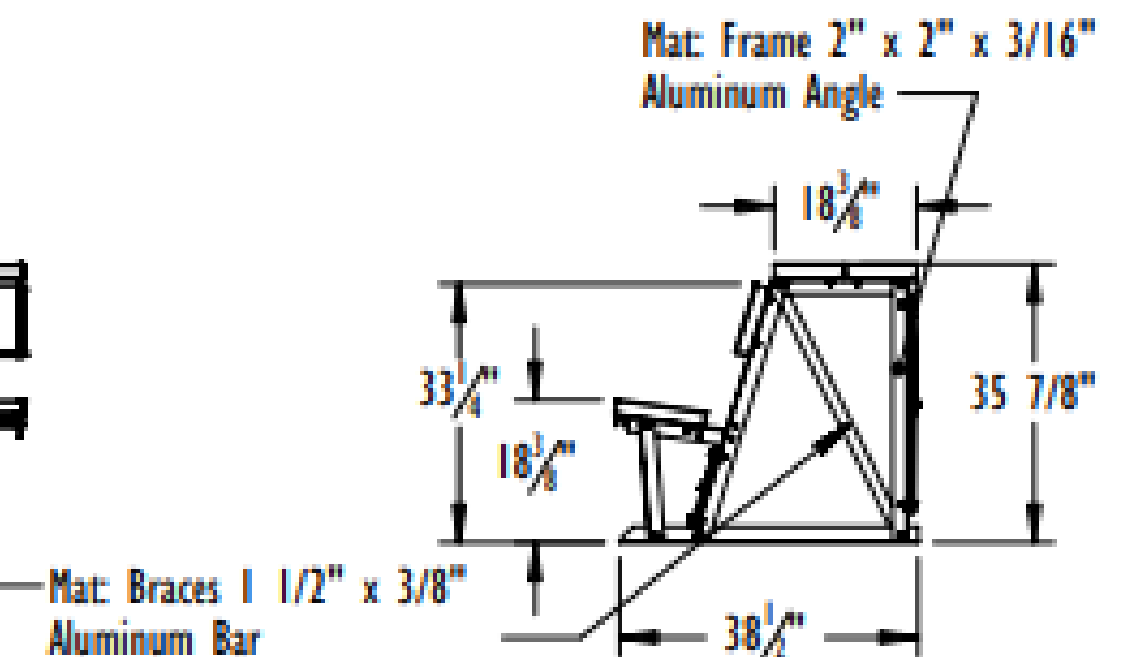

DESC. 4 FRAME ALUM DUGOUT BENCH W/ 21' ALUM PLANK & DBL SHELF	
MODEL NUMBER 21DSBPBA	WT.
DRAWN BY PAVEL	DATE 2/4/2013 Sheet 1 of 1
SCALE NONE	