





82PGA

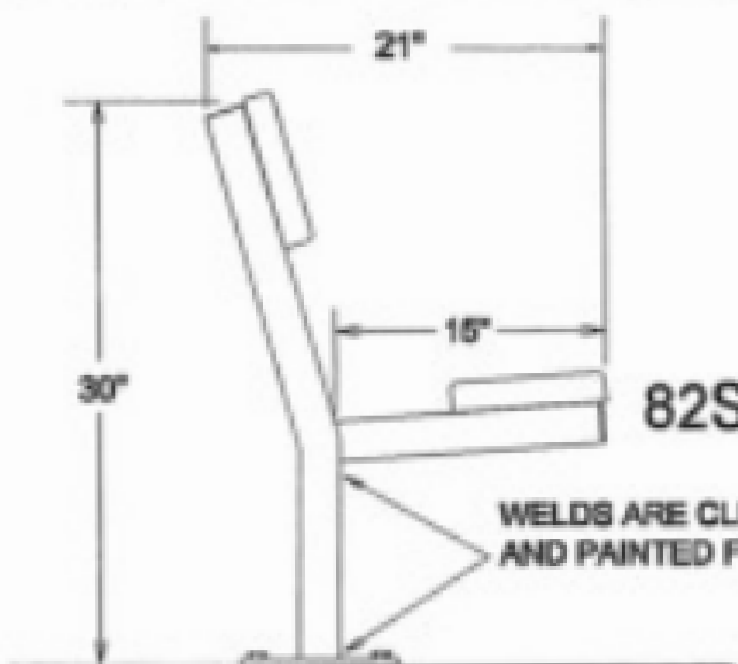

82SGASM


WELDS ARE CLEANED, COLD GALVANIZED AND PAINTED FOR A LONG LIFE

2 7/16" HOLES PER MOUNTING PLATE

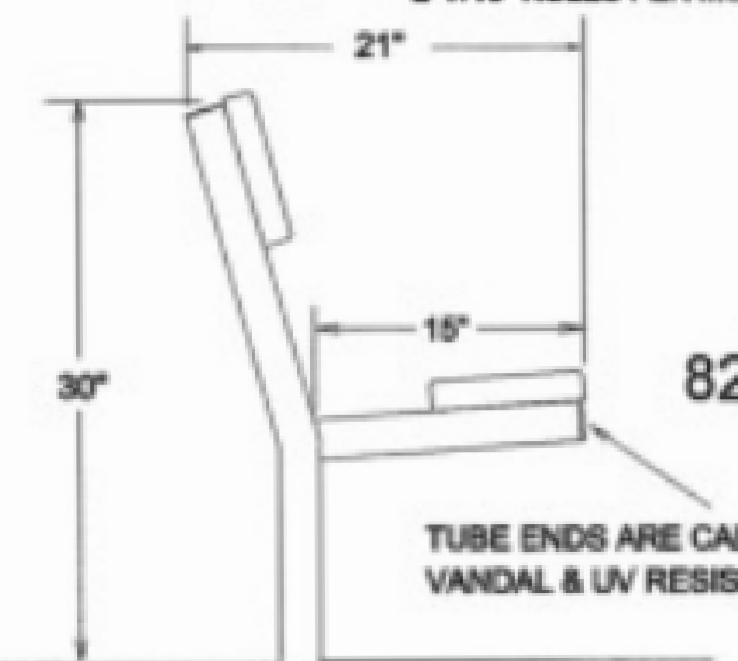

82SGA

TUBE ENDS ARE CAPPED WITH VANDAL & UV RESISTANT PLASTIC CAPS

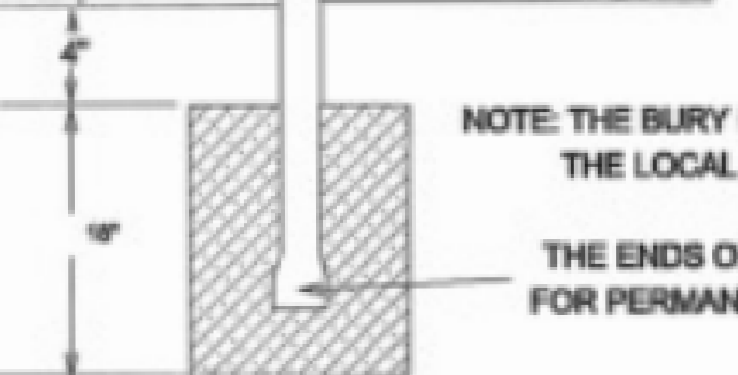


NOTE: THE BURY DEPTH OF THE CONCRETE FOOTING IS ONLY A SUGGESTION THE LOCAL SOIL CONDITIONS SHOULD DETERMINE WHAT IS NECESSARY

THE ENDS OF THE LEGS ARE DEFORMED FOR PERMANENT ANCHORING IN CONCRETE


END VIEWS

DETAIL OF PLANK

2"x 10" ANODIZED ALUMINUM SEAT & BACK PLANK
5/16"x 3 1/2" CARRIAGE BOLT

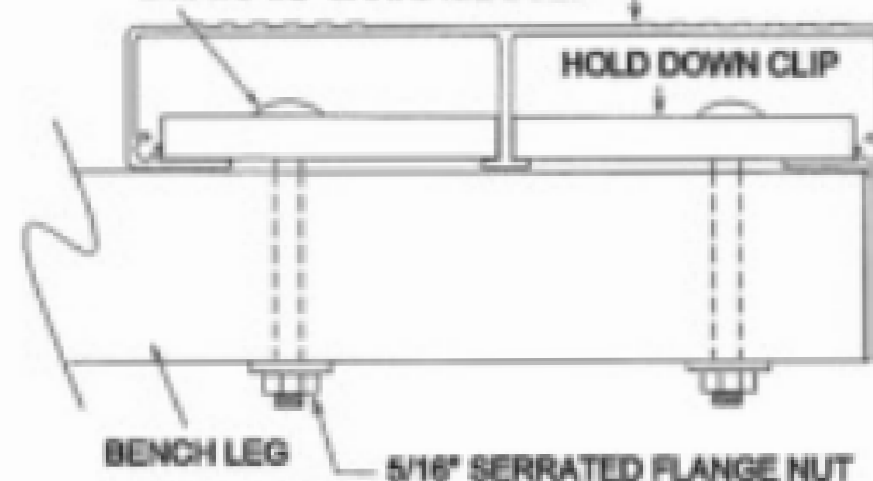



End Caps for Planking

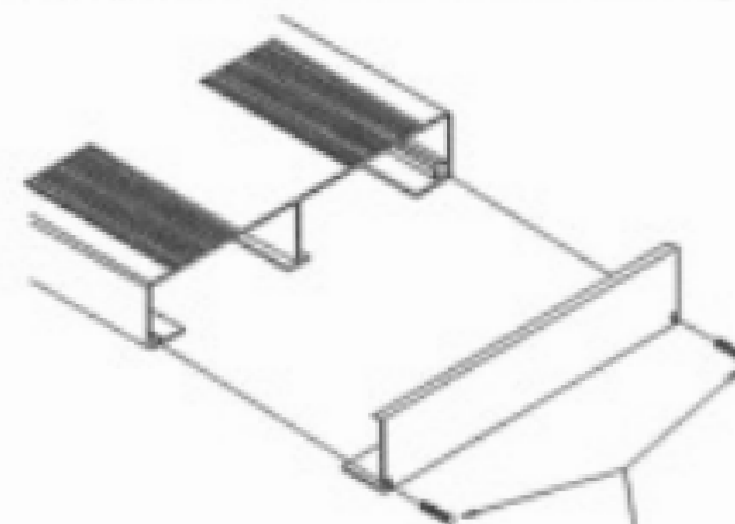

1/4"x 3/4" DRIVE SCREWS
TAP THESE INTO THE SCREW
CHASES WITH A SMALL HAMMER

FRONT VIEW

82PGA

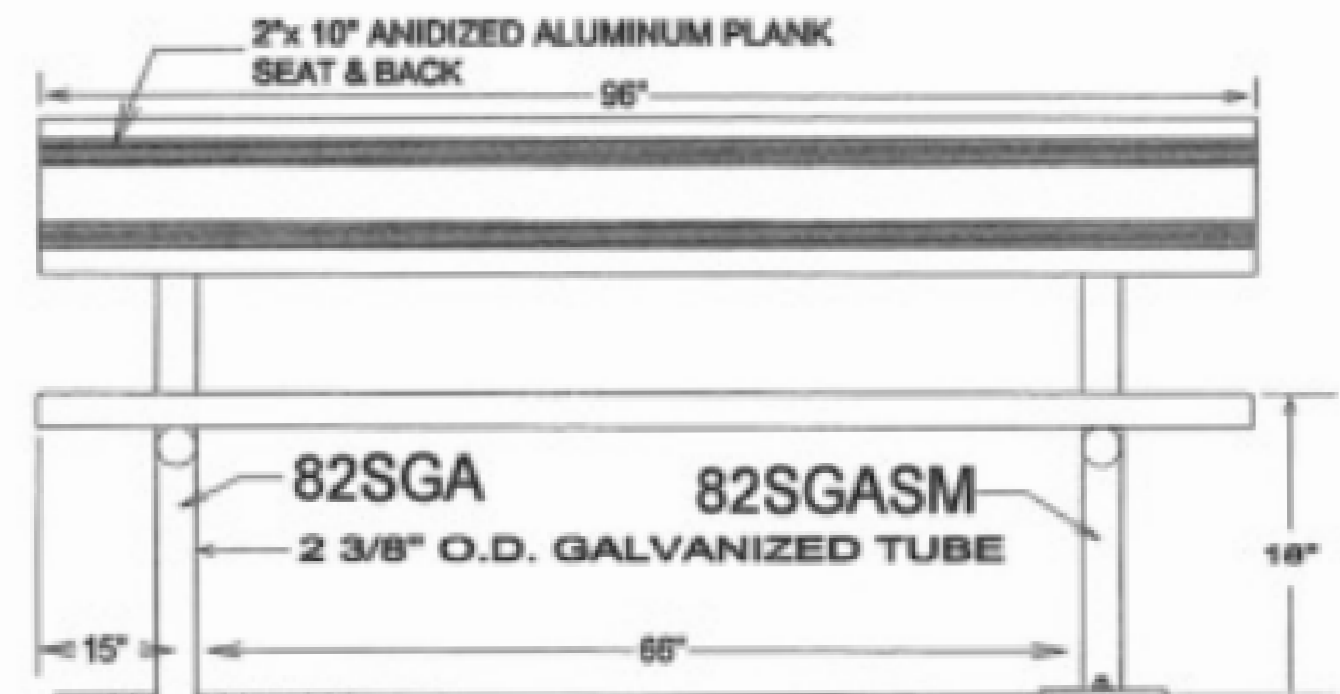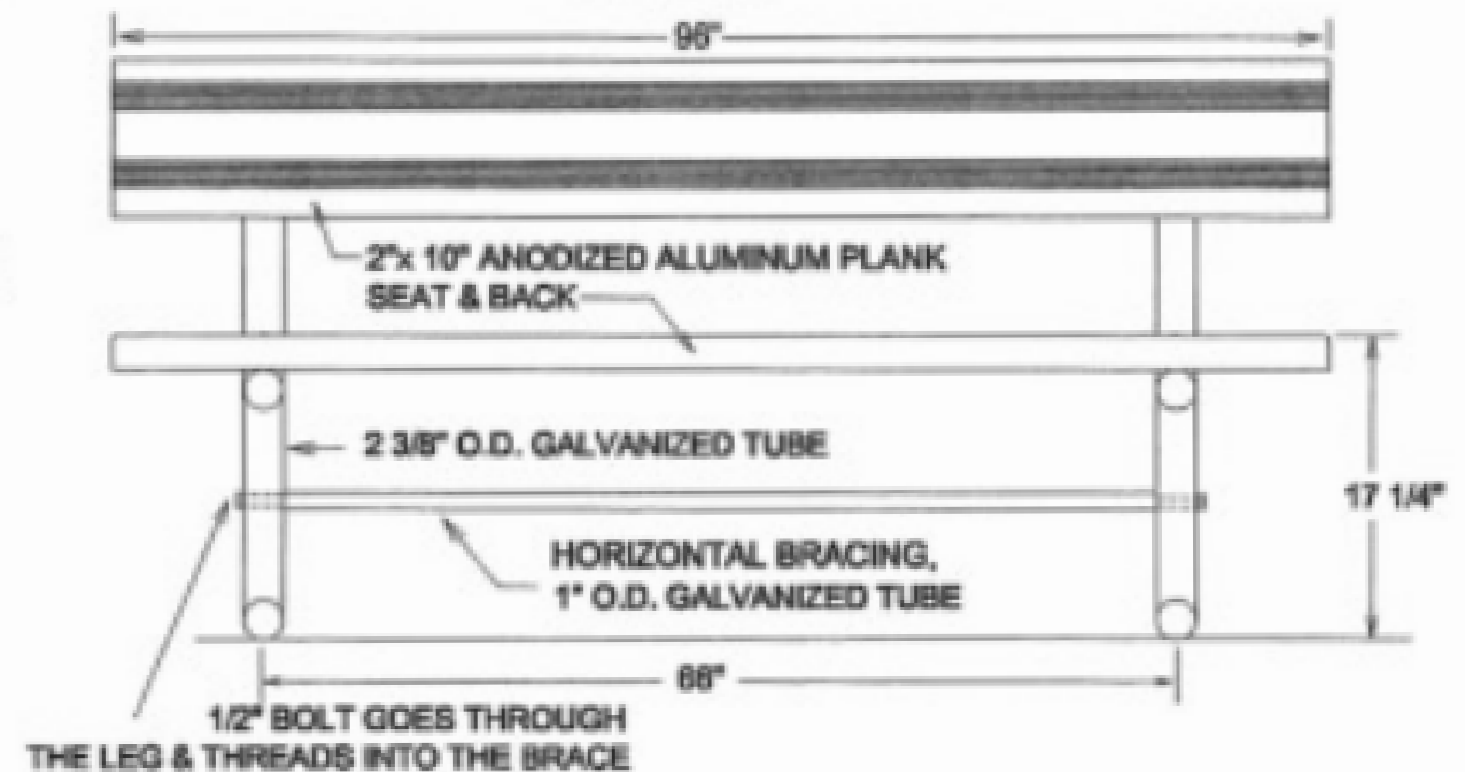

MODEL

WT.

82SGA

56 lbs.

82SGASM

56 lbs.

82PGA

64 lbs.

REV 10/00

FILE NO. 82PGA,82SGA,82SGASM

MODEL

SEE ABOVE

WT.

SEE ABOVE

DRAWN BY

JB

DATE

10/12/00

SCALE

NONE