





Nominal 2"x10"x.078
Aluminum Alloy 6063
T6 Extruded Foot plank
with an Mill Finish

Nominal 2"x10"x.078
Aluminum Alloy 6063
T6 Extruded Seat plank
with an Anodized Finish

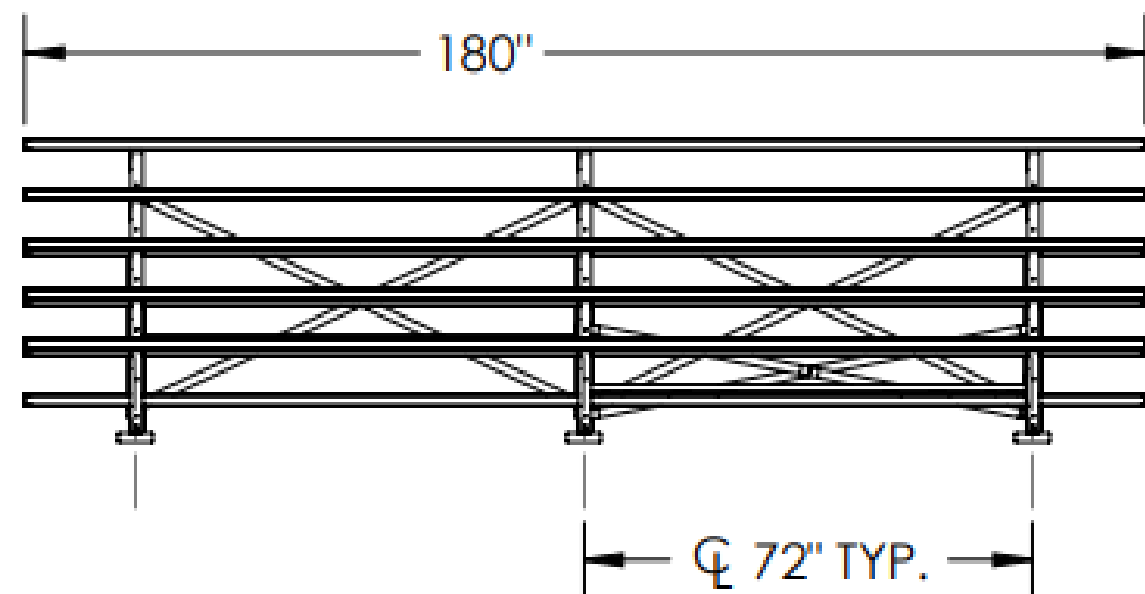

Frame Anchor Spacing


☐ 72" TYP.

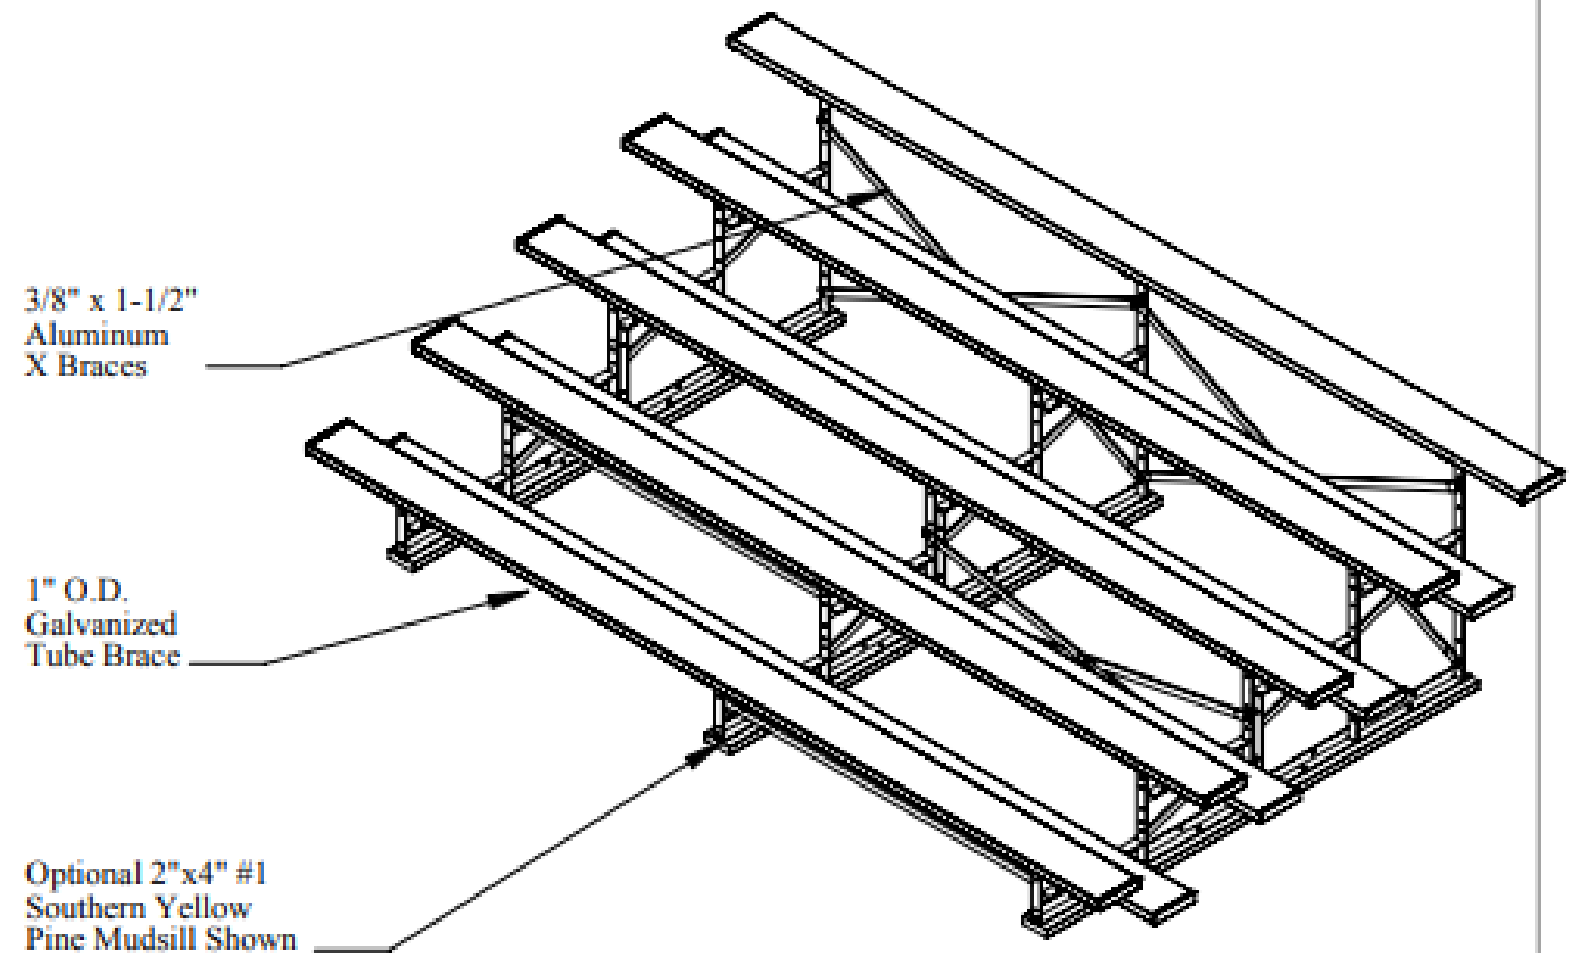

3/8" x 1-1/2"
Aluminum
X Braces

1" O.D.
Galvanized
Tube Brace

Optional 2"x4" #1
Southern Yellow
Pine Mudsill Shown

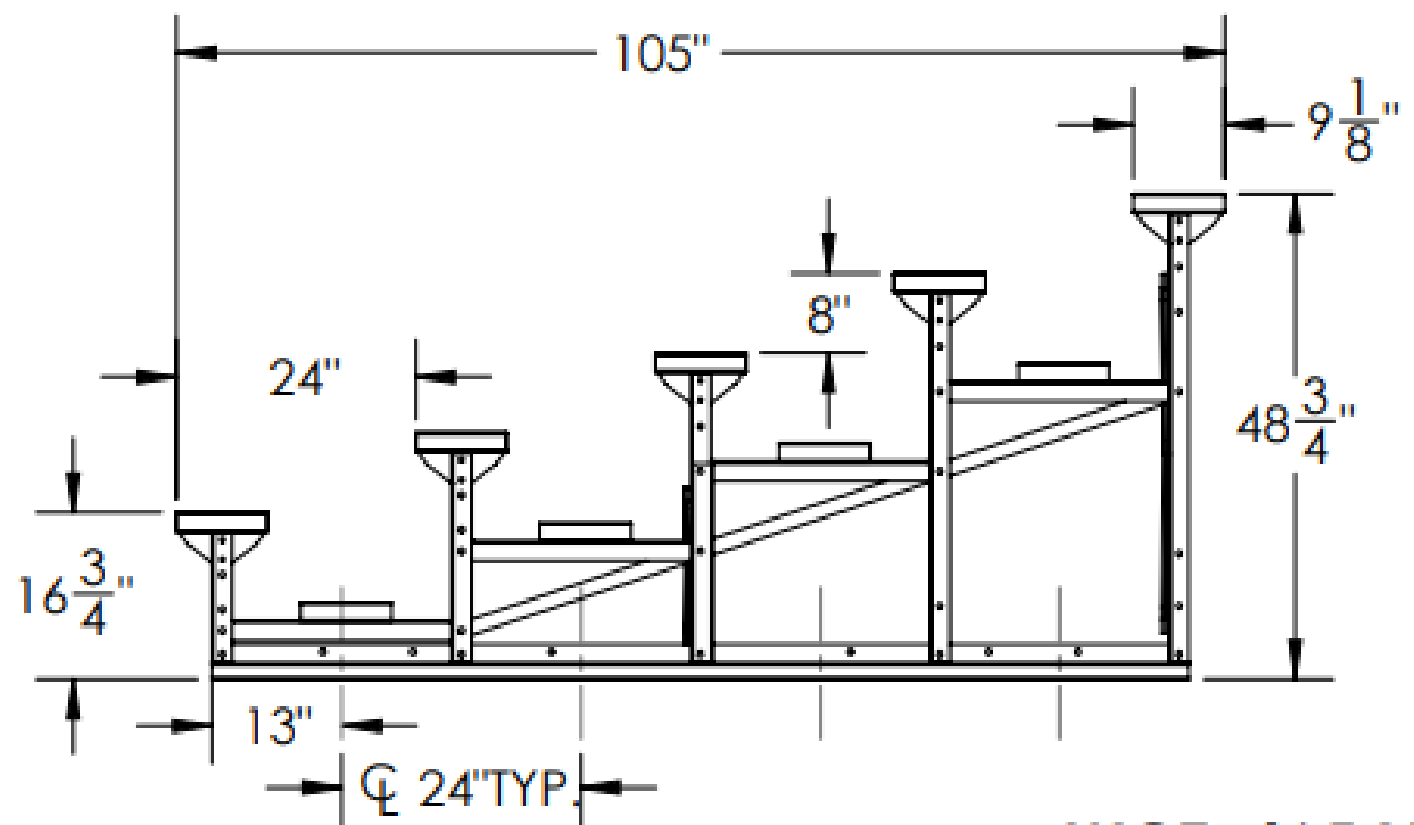

Frame Anchor Spacing

☐ 24" TYP.

WGT: 465 LBS.

	Initials	Date
Created:	DAT	2/21/2011
Saved:		3/17/2015
S:\CADDRWGS\Solidworks\Bleachers\BLA\BLA Assemblies\Bleachers (17in)		

Spec Drawing

Model #: BLA5A15

Description: 5 Row 15 Foot Aluminum Frame Bleacher with Single Foot Boards and No Gaurdrails

Notes: This Drawing and all information contained herein is the property of Kay Park Rec. and is not to be reproduced without express written permission. Kay Park Rec. assumes no responsibility for unauthorized use of this drawing. Kay Park Rec. is not responsible for local permits and occupancy requirements.