

3/11/2019 Page 1 of 9

HARDWARE 5/16" x 1" Machine Bolt 5/16" Washer 5/16" Kep Nut

3/11/2019 Page 2 of 9

PRODUCT SPECIFICATIONS

T46UL 46" PORTABLE TABLE WITH 4 SEATS

Top & Seats: 11 gauge die formed angle frame 1"x1-7/8" with 3" radius corners. 3/4" #9 steel expanded metal. 10 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Top is additionally supported to the corners with 10 gauge x 1-1/2" flat bar. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 1-5/8" O.D. x 14 gauge pre-galvanized structural steel tubing. Brace attachment points are 1-1/2"x2"x3/16" steel flat bar. Cross braces 1" O.D. x 16 gauge pre-galvanized structural steel tubing. Top is attached with 7 gauge 2"x2" die formed angle. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Legs are bent over a mandrel through the bend radius producing a wrinkle free bend. Holes are predrilled in legs for optional surface mounting. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: Top is 46" square x 30" high. Seats are 10" wide x 36" long x 18" high. Outside to outside dimensions of 4 seat table is 76-3/4" square.

3/11/2019 Page 3 of 9

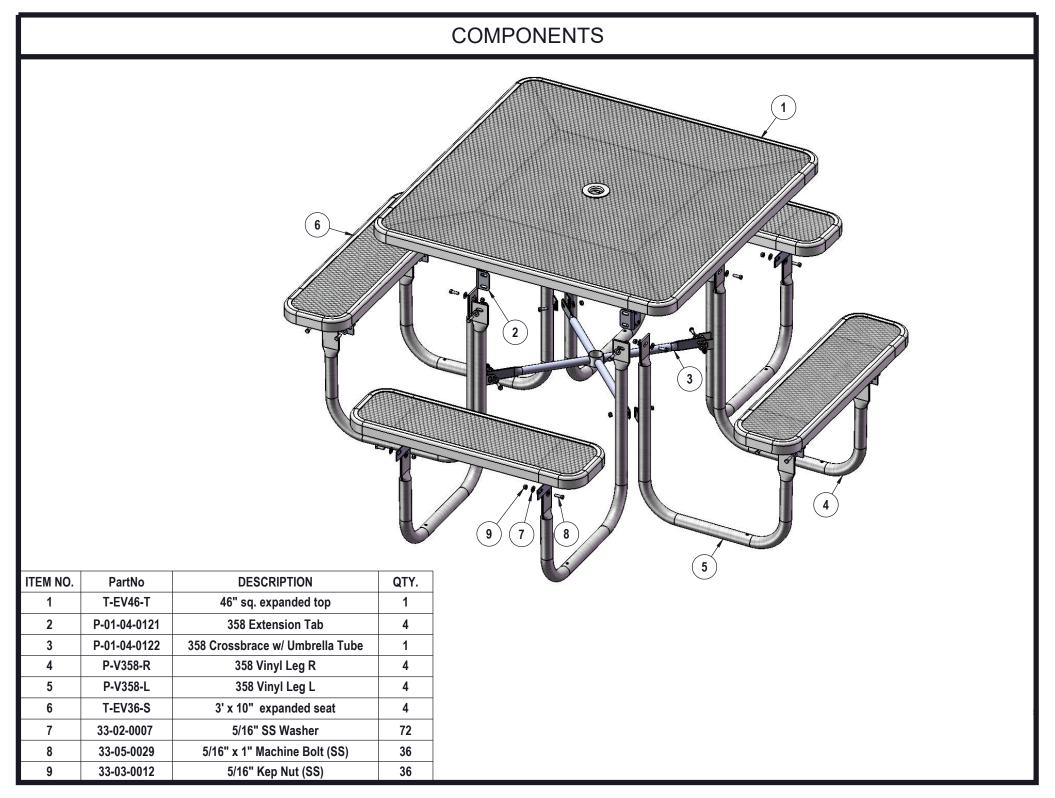


3/11/2019 Page 4 of 9

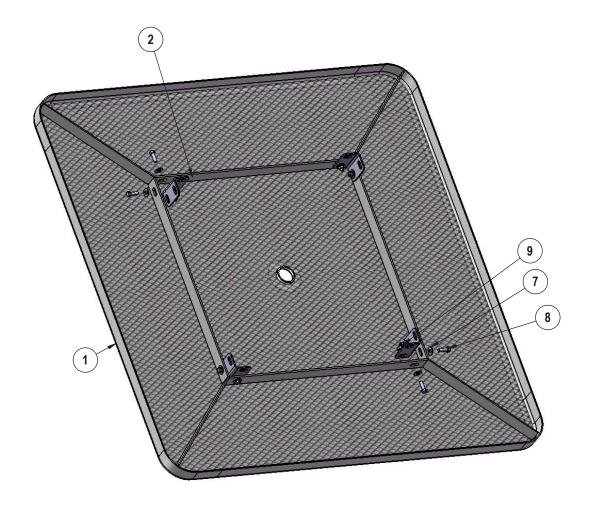


Attach the Extension Tabs to the 46" Square Top using specified hardware.

3/11/2019 Page 5 of 9

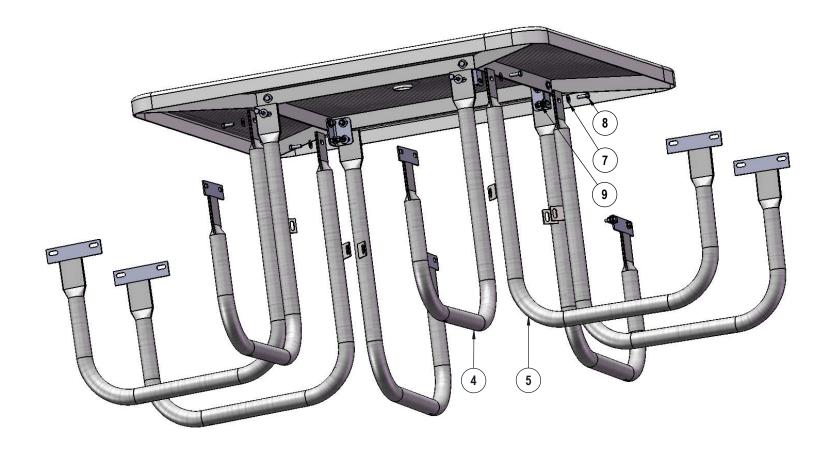

Attach the Legs to the outside of the Extension Tabs using specified hardware.

3/11/2019 Page 6 of 9

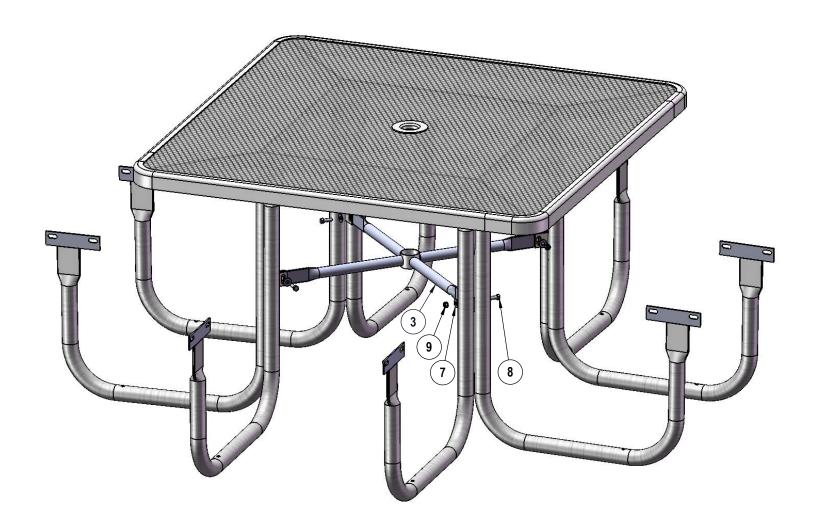


Attach the Crossbrace between the table legs as shown using specified hardware.

3/11/2019 Page 7 of 9



Attach the 3' Seats to the Legs using specified hardware.

3/11/2019 Page 8 of 9

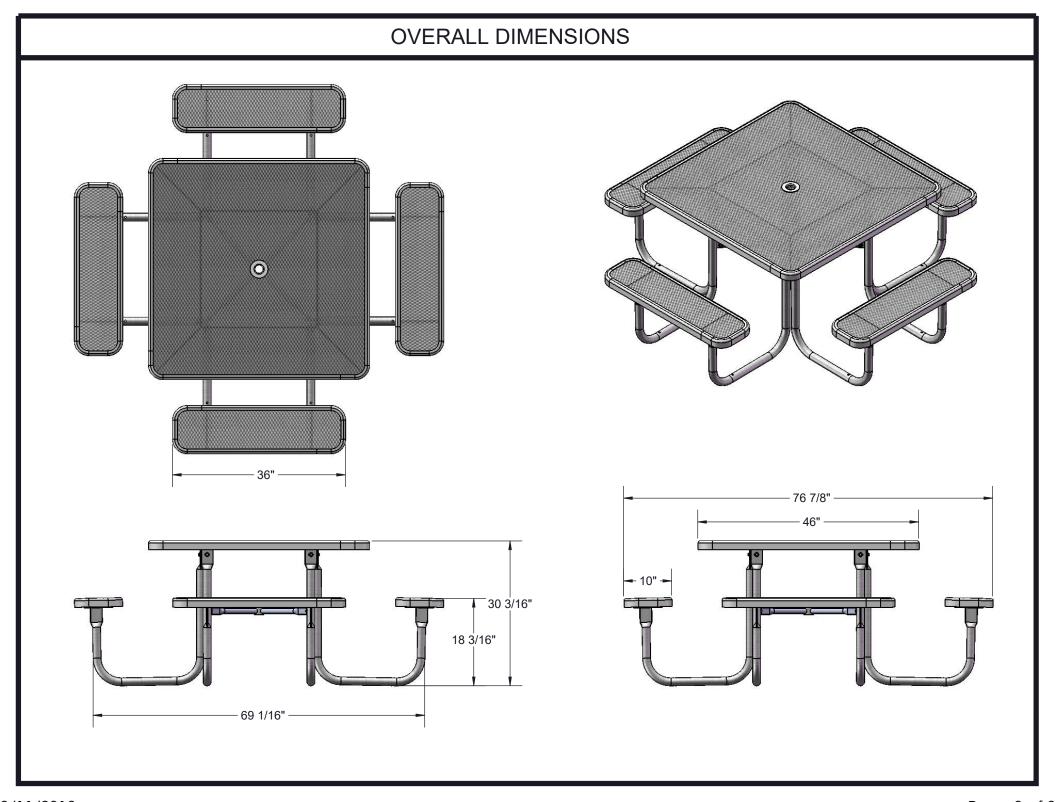

3/11/2019 Page 9 of 9